REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		12/11/12'

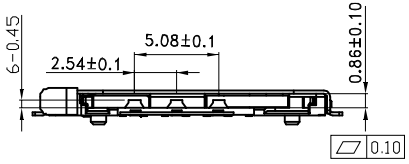

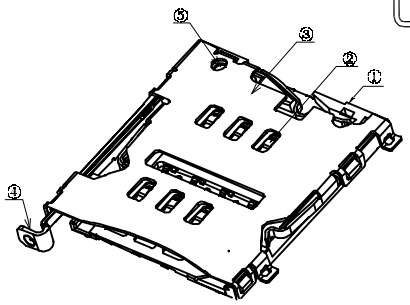

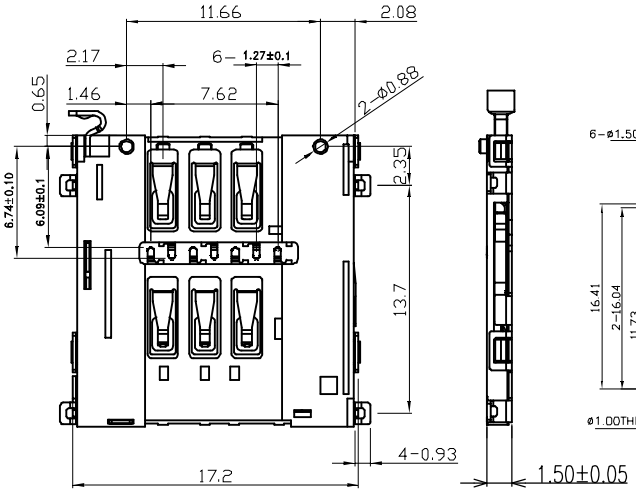

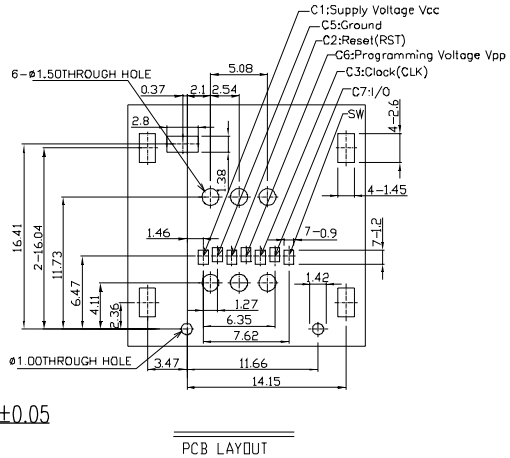

PCB LAYOUT

NOTE:

1. ELECTICAL CHARACTERISTICS:
   1-1.VOVTAGE:30V DC.MAX
   1-2.LOW LEVEL CONTACT RESISTANCE:30 mohms MAX.INITIALLY
   1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC MIN.FOR 1 MINUTE
   1-4.INSULATION RESISTANCE :100Mohma MIN.(DC 500V FOR 1 MINUTE)
2. MECHANICAL CHARACTERISTICS:
   2-1.DURABILITY:1500 CYCLES
   2-2OPERATING FORCE(INSERTING &WITHDRAWAL):1N-10N
3. ENVIRONMENTAL CHARACTERISTICS:
   3-1.RANGE:-25°C TO 85°C.(INCLUDING TERMINAL TEMP.RISE
   3-2.STORAGE TEMP :-40°C TO 85°C
4. QUANTITY OF PRODUCTS:1000PCS/REEL MIN
5. PLAESE CONTACT SALES REPRESRNTATIVE TO VERIFY PRODUFT DATAILS

料号编码

SM40-07 A B 05-00
① ② ③④ ⑤

① 产品系列:
SM40:SIM CDARD PUSH-PUSH CARD

② 产品PIN数:
07: 7PIN

③ 塑胶材料:
A: LCP

④ 塑胶颜色:
B: 黑色

⑤ 产品流水号
00:

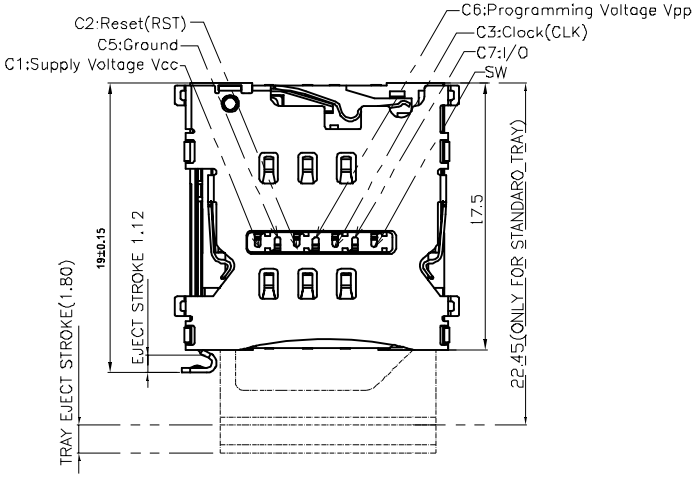

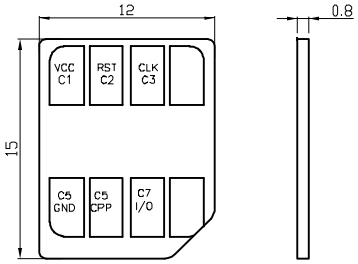



CUSTOMER DRAWING	YTCONN http://www.hnytconn.com	Dongguan YTCONN Electronics Technology Co., Ltd.		
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	DEYI	TITLE:	Mini SIM PUSH-PUSH卡座 (H=1.5mm)
	APPROVED		P/N:	SM40-07AB05-00
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DATE	2013.06.18	DRAWING NO.	C-SM40-00
	UNIT mm	SCALE 1:1	SIZE A4	SHEET 1of1 REV A