

REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012/4/24

NOTES :

- 1.0. RATING :
- 1.1. Operating voltage : 250 VAC MIN
- 1.2. Operating current : 2.0 AMPERE MIN
- 1.3. TEMPERATURE : -55°C TO +125°C
- 2.0. ELECTRICAL CHARACTERISTIC :
- 2.1. CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL
- 2.2. INSULATION RESISTANCE :500 MEGOHMS MINIMUM
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0. MATERIALS :
- 3.1. CONTACT : COPPER ALLOY
- 3.2. HOUSING : THERMOPLASTIC, GLASS FILLED, 130°C, UL 94V-0 RATED

PRODUCT NO.

BT11-03 A B 10-0*

① ② ③ ④

PRODUCT SERIES:

① BT11: 3PIN BATTERY

② PIN NO.:

03: 3PIN








③ MATERIAL:

A: LCP

④ SERIES NO.:

00: H=4.5mm, DIM T=0.5mm

01: H=4.5mm, DIM T=0.6mm

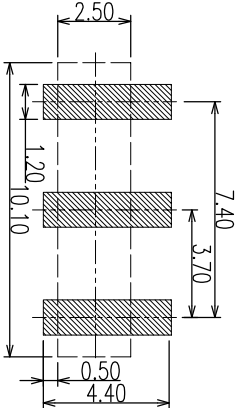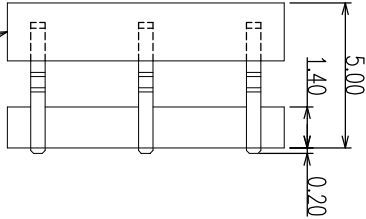

CUSTOMER DRAWING		YTCONN <i>Dongguan YTCONN Electronics Technology Co., Ltd.</i>	
GENERAL TOLERANCE	DRAWING	DEY1	TITLE: 8900 BATTERY 连接器
X. ±0.20	APPROVED		P/N: BT11-03AB10-0*
.XX ±0.15	DATE	2012.04.24	DRAWING NO. C-BT11-00
.XXX ±0.10			
ANGEL TOLERANCE			
X. ±3°			
.XX ±2°			
.XXX ±1°			
	UNIT	mm	SCALE
			1:1
			SIZE
			A4
			SHEET
			1 of 1
			REV
			A