
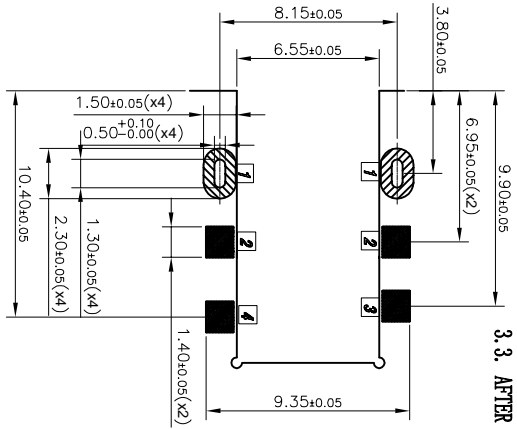
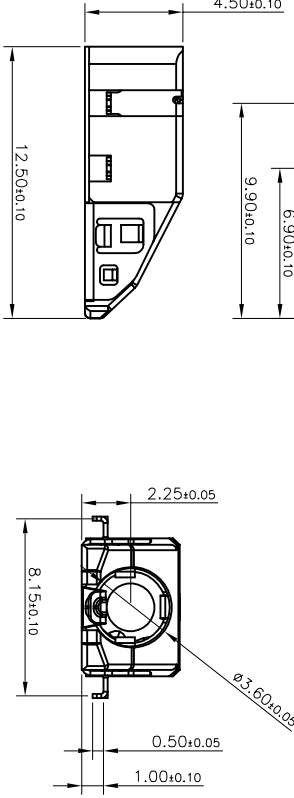


REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2013/01/10

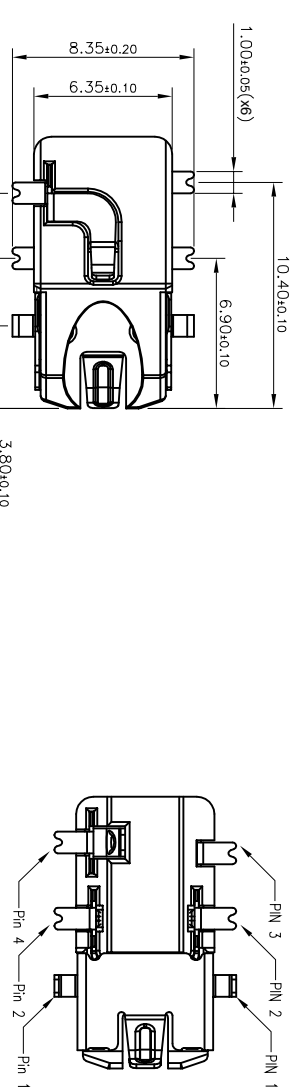

- NOTES :
1. (0) RATING :
- 1.1. VOLTAGE : 12 VDC (R.M.S.)
 - 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30° C T-RISE
 - 1.3. TEMPERATURE : -25° C TO +85° C
2. (0) ELECTRICAL CHARACTERISTIC
- 2.1. CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m
 - 2.2. INSULATION RESISTANCE : 100 M MIN.
 - 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
3. (0) MECHANICAL :
- 3.1. DURABILITY, MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
 - 3.2. INITIAL-MATING FORCE: 300g~2000g UNMATING FORCE: 200g~2000g
 - 3.3. AFTER LIFE TESTING-MATING FORCE: 300g~2000g UNMATING FORCE: 200g~2000g

PRODUCT NO.

PJ05-06 A B 03-04

① ② ③ ④

① PRODUCT SERIES:

PJ05: PHONE JACK CONNECTOR

② PIN NO.:

06: 6PIN


③ MATERIAL:

A: LCP


④ SERIES NO.:

04: 沉板1.0, 前两插后四贴

RECOMMEND PAD LAYOUT

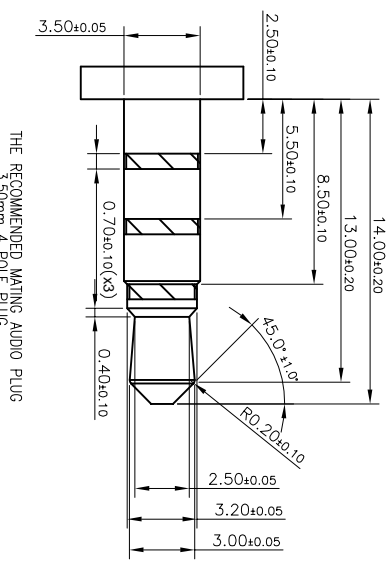

THE RECOMMENDED MATING AUDIO PLUG IS 3.50mm 4-POLE PLUG



CUSTOMER DRAWING		YTCOON	
DONGGUAN YTCOON Electronics Technology Co., Ltd		TITLE: AUDIO JACK 3.5mm 插头 沉板1.0mm (前两插后四贴)	
GENERAL TOLERANCE	X ±0.20	DRAWING	DEV1
	.XX ±0.15	APPROVED	
	.XXX ±0.10	DATE	2014. 10. 29
ANGEL TOLERANCE	X ±5°	UNIT	mm
	.XX ±2°	SCALE	1:1
	.XXX ±1°	SIZE	A4
		SHEET	1 of 1
		REV	A
		DRAWING NO.	C-PJ05-04