
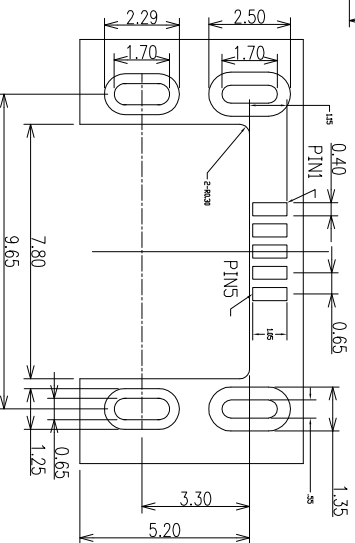
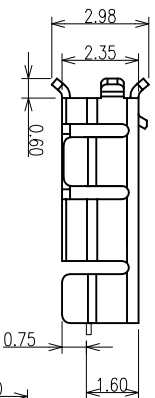
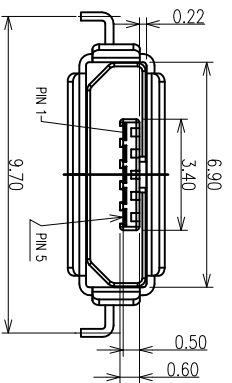



REV	ECH #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.04.26

SPECIFICATIONS

- VOLTAGE RATING:30V AC
- CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A(FOR TERMINAL NO.2,3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A(FOR TERMINAL NO.1 AND 5)
0.5A(FOR TERMINAL NO.2,3 AND 4)
- INSULATION RESISTANCE:100M MIN/AT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- CONTACT RESISTANCE:30m MAX.
- OPERATING TEMPERATURE:-30 TO +80?

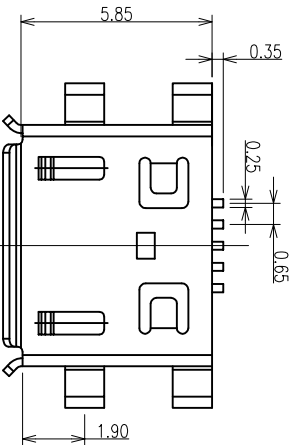

RECOMMEND P.C.B.LAYOUT

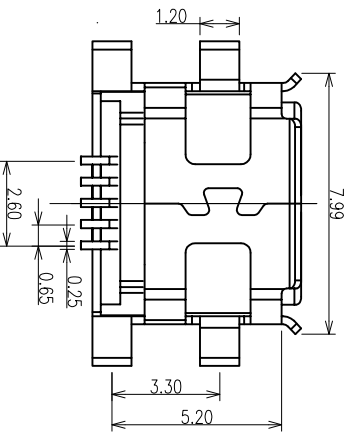

PRODUCT NO.

MU13 - 05 A B 05 - 01

- ①
- ②
- ③
- ④

① 产品系列:

MU13: MICRO USB 5PIN RECEPTACLE

② 产品PIN数:

05: 5PIN

③ 材质:

A: LCP

④ 产品流水码:

01: 沉板0.8 DIP AB TYPE 有翻边

YTCOONN
<http://www.ytconn.com>

Dongguan YTCOONN
Electronics Technology Co., Ltd.

CUSTOMER DRAWING	DRAWING	DEV1	TITLE:	MICRO USB 5PIN RECEPTACLE
GENERAL TOLERANCE	APPROVED		P/N:	MU13-05AB05-01
X ±0.20			DRAWING NO.	C-MU13-01
XX ±0.15				
XXX ±0.10				
ANGLE TOLERANCE	DATE	2013.05.11		
X ±3°	UNIT	mm	SCALE	1:1
XX ±2°	SIZE	A4	SHEET	1of1
XXX ±1°	REV		REV	A

