

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/04/26

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 1000Ω MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.;
 - PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

PRODUCT NO.

PJ12-06 A B 05-01

① ② ③ ④

① PRODUCT SERIES:

PJ12:AUDIO JACK 4.7H

② PIN NO.:





06: 6PIN

③ MATERIAL:

A: PA-9T

④ SERIES NO.:

01: 前两插后四贴

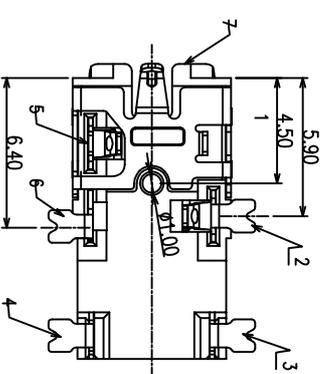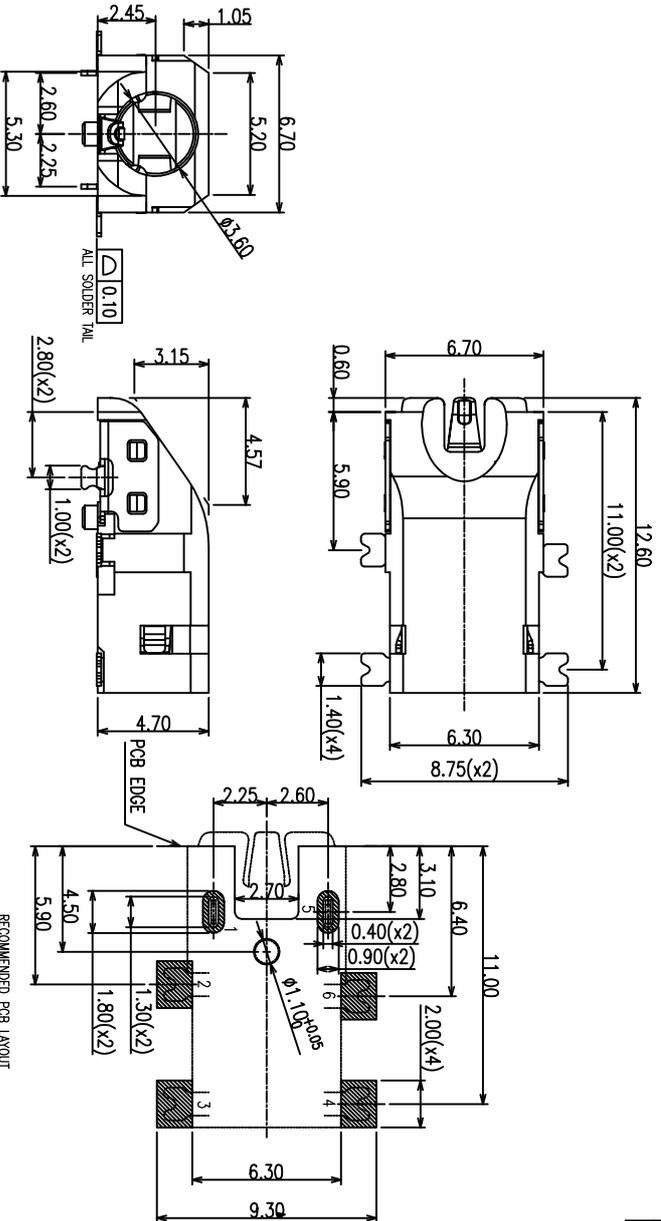

电源焊图

TABLE A:

ITEM	NAME	QTY	MATERIAL / FINISH
7	HOUSING	1	HIGH TEMPERATURE UL 94-V0 BLACK
6	CONTACT 6	1	COPPER ALLOY/CONTACT AREA GOLD PLATED
5	CONTACT 5	1	COPPER ALLOY/CONTACT AREA GOLD PLATED
4	CONTACT 4	1	COPPER ALLOY/CONTACT AREA GOLD PLATED
3	CONTACT 3	1	COPPER ALLOY/CONTACT AREA GOLD PLATED
2	CONTACT 2	1	COPPER ALLOY/CONTACT AREA GOLD PLATED
1	CONTACT 1	1	COPPER ALLOY/CONTACT AREA GOLD PLATED

CUSTOMER DRAWING

YTCOONN

Dongguan YTCOONN Electronics Technology Co., Ltd

GENERAL TOLERANCE

X ±0.20

.XX ±0.15

.XXX ±0.10

ANGEL TOLERANCE

X ±.5°

.XX ±.2°

.XXX ±.1°

DRAWING

DEV1

APPROVED

P/N:

DATE

2016. 01. 12

UNIT

mm

TITLE:

AUD10 JACK 4.7H 斜口, 板上型

前内插后四贴

PJ12-06AB05-01

DRAWING NO. C-PJ12-01

SCALE 1:1

SIZE A4

SHEET 1 of 2

REV B