
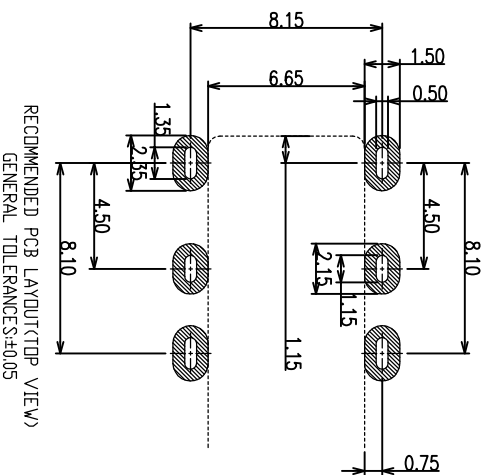
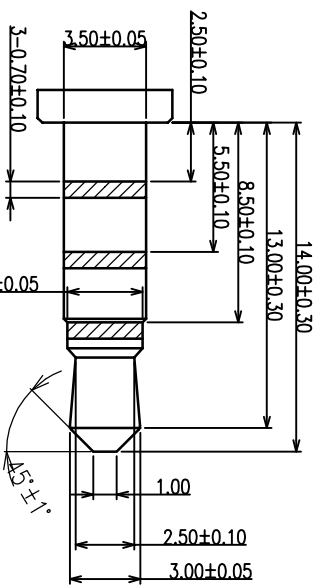
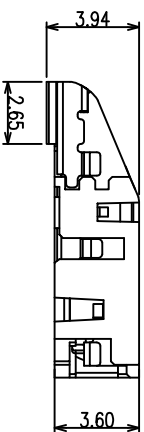

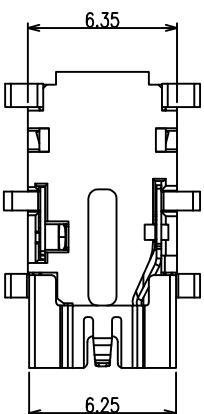

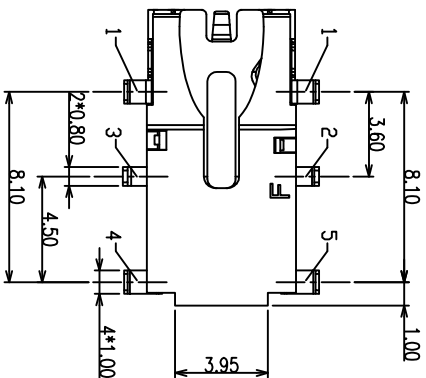



P5	DETECT
P4	LFT
P3	RT
P2	MIC
P1	GND
PIN NO.	NAME



REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 1000Ω MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2.94N(O.30kgf) MIN.;

PRODUCT NO.

PJ23-05 A B 03-07

- ① ② ③ ④

① PRODUCT SERIES:

PJ23: PHONE JACK CONNECTOR.

② PIN NO.:

05: 5PIN

③ MATERIAL:

A: PA9T

④ SERIES NO.:

07:斜口, 沉板2.2H

YTCOON

Dongguan YTCOON
Electronics Technology Co., Ltd

CUSTOMER DRAWING

GENERAL TOLERANCE

X ±0.20
.XX ±0.15
.XXX ±0.10

ANGEL TOLERANCE

X ±5°
.XX ±2°
.XXX ±1°

DRAWING

DEV1

TITLE:

PHONE JACK CONNECTOR沉板2.2H斜口

APPROVED

P/N:

DATE

2016. 01. 13

ANGEL TOLERANCE

DRAWING NO.

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1of1

REV

A

PLUG SPEC