
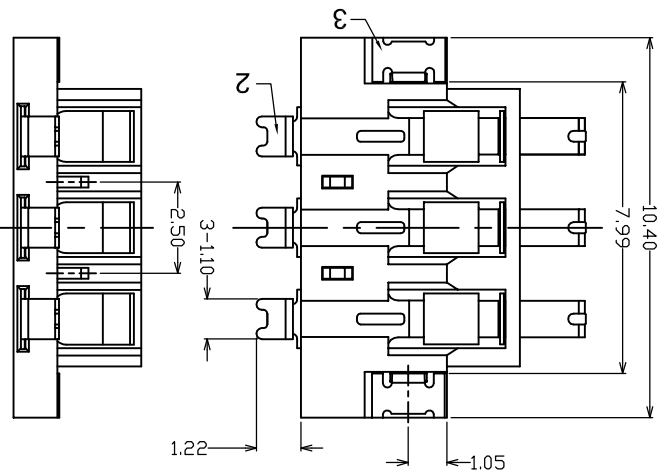
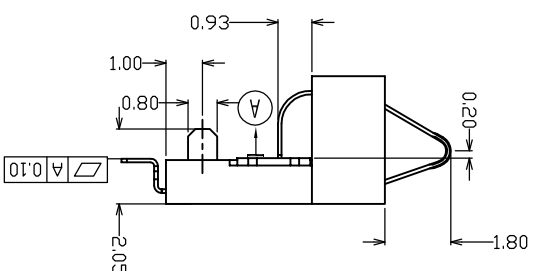


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/11/24

SPECIFICATIONS:

- CURRENT RATING:0.5A 50V AC/DC.
- CONTACT RESISTANCE:60mΩ MAX AT DC 20mA.
- INSULATION RESISTANCE:500MΩ MIN AT 500V DC.
- DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
- OPERATING TEMPERATURE RANGE:-30C TO +85C.

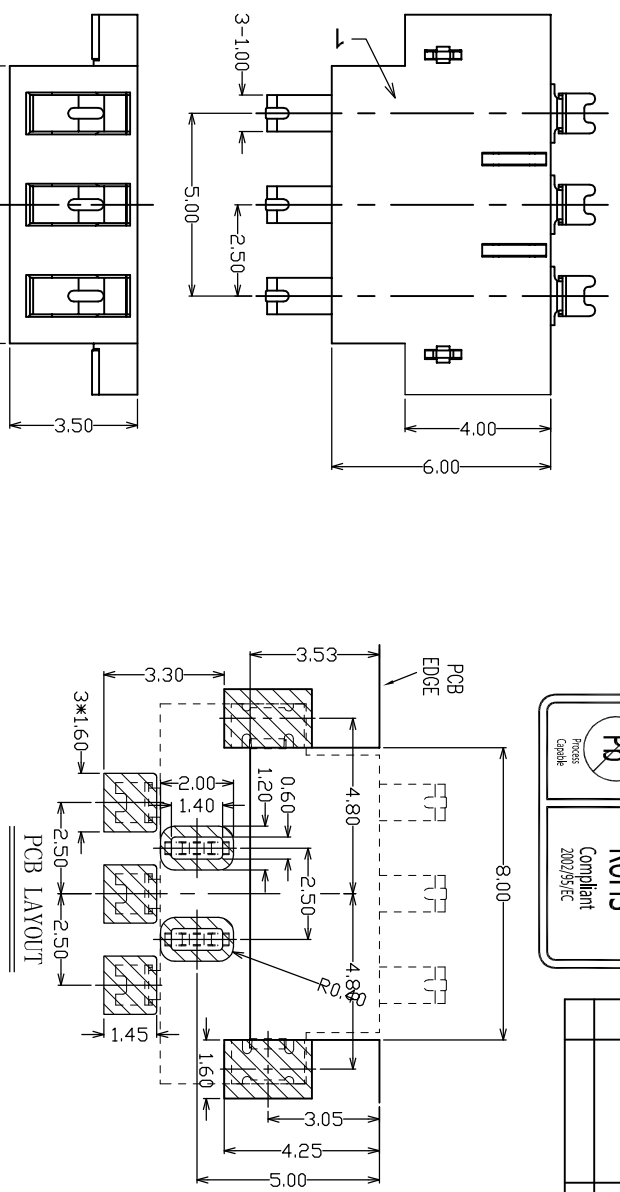

TABLE

No.	TITLE	MATERIAL	FINISH(OR COLOR)	NO.
1	HOUSING	LCP+30%GF,UL94 V-0	BLACK	1
2	TERMINAL	BeCu,T=0.10mm	All Au over Nickel Plated	3
3	GROUND SLICE	BRASS(C2680R+H),T=0.20mm	TIN 100U"PLATED	2
4	GO TO SLICE	BRASS(C2680R+H),T=0.30mm	TIN 100U"PLATED	2

- ① BT20: 破板式电池座
- ② PIN NO. : 03: 3PIN
- ③ MATERIAL: A: LCP
- ④ SERIES NO. : 00:H=3.5mm

PRODUCT NO. BT20-03 A B 05-00
 PRODUCT SERIES: ① ② ③ ④

GENERAL TOLERANCE		DRAWING		TITLE	
X	±0.20	DEV1		3PIN BATTERY SMT	
.X	±0.15	APPROVED		破板式(2SPITCH,3.5H有柱)	
.XX	±0.10	DATE	2012. 11. 24	P/N:	BT20-03AB05-00
.XXX	±0.10	ANGLE TOLERANCE		DRAWING NO.	C-BT20-00
X	±3°				
.XX	±2°				
.XXX	±1°				

YTCOMM
 Dongguan YTCOMM Electronics Technology Co., Ltd.
<http://www.ytcomm.com>

UNIT	SCALE	SIZE	A4	SHEET	1 of 1	REV	A
mm	1:1	A4	1	1	1	A	