
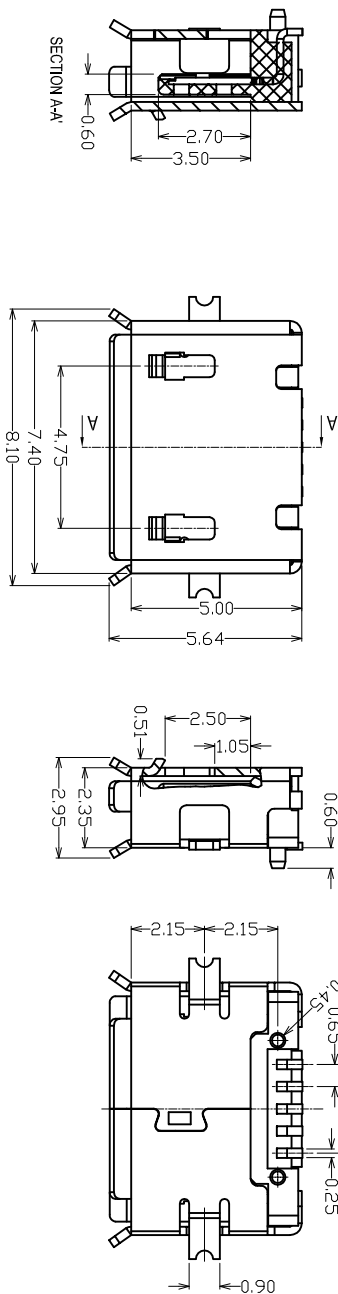


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			

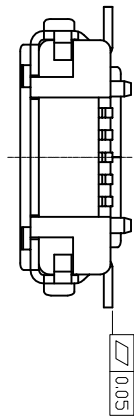

- NOTES:
1. MATERIAL:
A. PIN&SHELL: ALLOY COPPER
B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS
UL94V-0, BLACK.
 2. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 250 VAC MIN
CURRENT RATING: 2.0 A MIN
DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
INSULATION RESISTANCE: 100 MEG OHM MIN
CONTACT RESISTANCE: 100 MILLIOHM MAX
OPERATION TEMPERATURE: -55ï¿½ TO +125ï¿½
 3. MECHANICAL SPECIFICATIONS:
3.1 DURABILITY: 5,000 CYCLES
 4. THE DIMENSION MARKED No. SHOULD BE CHECKED IN PRODUCTION.
 5. MATERIAL SHOULD BE FULFILLED ROHS REQUIREMENTS.

PRODUCT NO.

MU05 - 05 A B 05 - 09

① ② ③ ④

① 产品系列:

MU05: MICRO USB 连接器

② 产品PIN数:

05: 5PIN

③ 主体材质:


A: LCP

④ SERIES NO.:

09:AB TYPE带定位柱

TABLE A:

3	SHELL	1	ALL Tin PLATED	
2	HOUSING	1	Thermoplastic UL94V-0, BLACK	
1	CONTACT	5	Au PLATED OVER Sn PLATED	
ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK

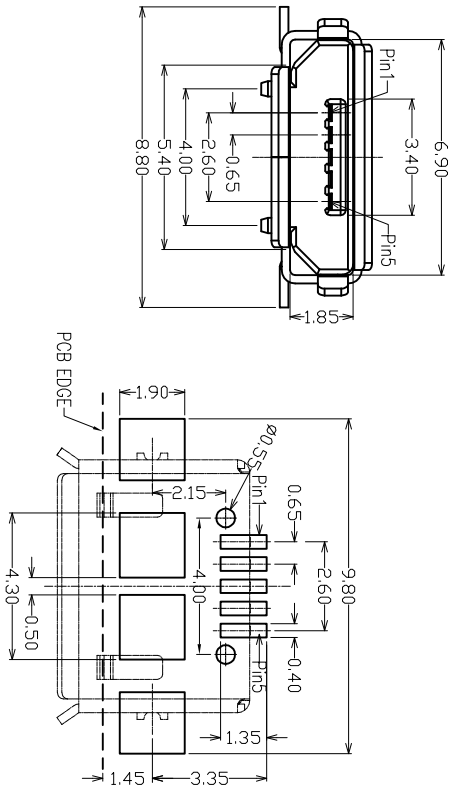

YTCNN Dongguan YTCNN
Electronics Technology Co., Ltd.

CUSTOMER DRAWING

GENERAL TOLERANCE

X. ±0.20

.XX ±0.15

.XXX ±0.10

ANGLE TOLERANCE

X. ±3°

.XX ±2°

.XXX ±1°

DRAWING DEVT

APPROVED

DATE 2012. 04. 26

TITLE: MICRO USB CONNECTOR AB TYPE.
带定位柱

P/N: MU05-05AB05-09

DRAWING NO. C-MU05-09

UNIT	SCALE	SIZE	A4	SHEET	1 of 1	REV	A
mm	1:1	A4	SHEET	1 of 1	REV	A	