

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000 Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.;

PRODUCT NO.

PJ18-05 A B 03-XX

① ② ③ ④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO.:


05: 5PIN

③ MATERIAL:






A: PA9T

④ SERIES NO.:

02:正向沉板2.0

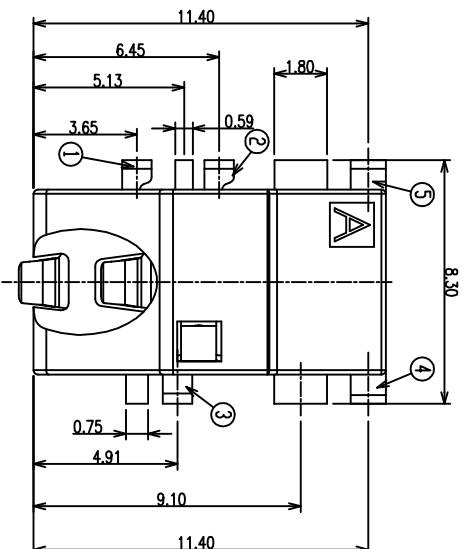

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE:0.05)

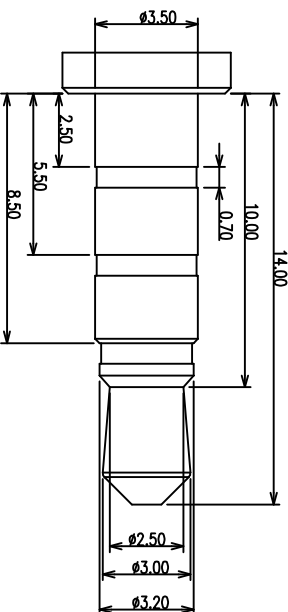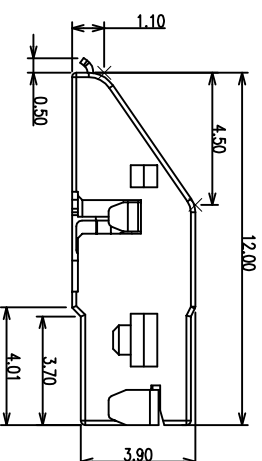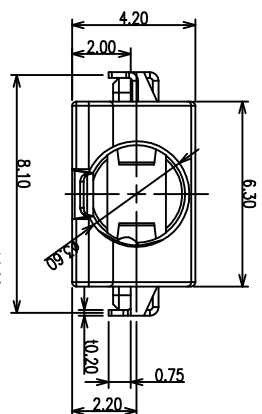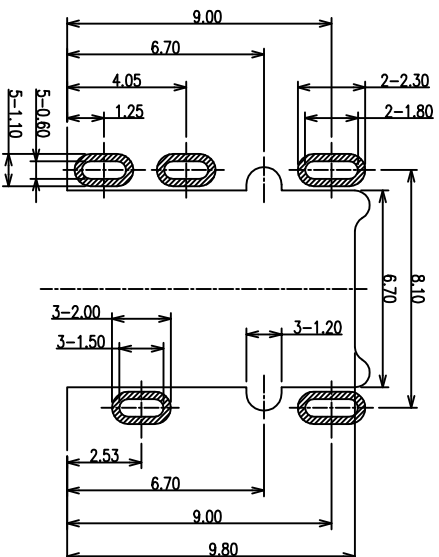

CUSTOMER
DRAWING

YTCONN
<http://www.ytconn.com>

Dongguan YTCONN
Electronics Technology Co., Ltd.

GENERAL TOLERANCE

X: ±0.20
.XX: ±0.15
.XXX: ±0.10

ANGLE TOLERANCE

X: ±5°
.XX: ±2°
.XXX: ±1°

DRAWING

DEV1

TITLE:

φ3.50mm PHONE JACK CONNECTOR

APPROVED

P/N:

DATE

2013.08.10

DRAWING NO. C-PJ18-01

UNIT

mm

SCALE

1:1

SIZE A4

SHEET

1 of 1

REV

A

DATE

2013.08.10

DRAWING NO.

C-PJ18-01

SIZE A4

SHEET

1 of 1

REV

A

SIZE A4