

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012.04.26

### SPECIFICATIONS

- 1.VOLTAGE RATING:30V AC
- 2.CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:  
1.0A(FOR TERMINAL NO.2,3 AND 4)  
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:  
1.8A(FOR TERMINAL NO.1 AND 5)  
0.5A(FOR TERMINAL NO.2,3 AND 4)
- 3.INSULATION RESISTANCE:100M MIN/AT 100V DC
- 4.DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- 5.CONTACT RESISTANCE:30m MAX.
- 6.OPERATING TEMPERATURE:-30 TO +80?

### PRODUCT NO.

MU13 - 05 A B 05 - 03

① ② ③ ④

① 产品系列:

MU13: MICRO USB 5PIN RECEPTACLE

② 产品PIN数:







05: 5PIN

③ 材质:

A: LCP

④ 产品流水码:

03: 沉板1.05 DIP AB TYPE 无翻边

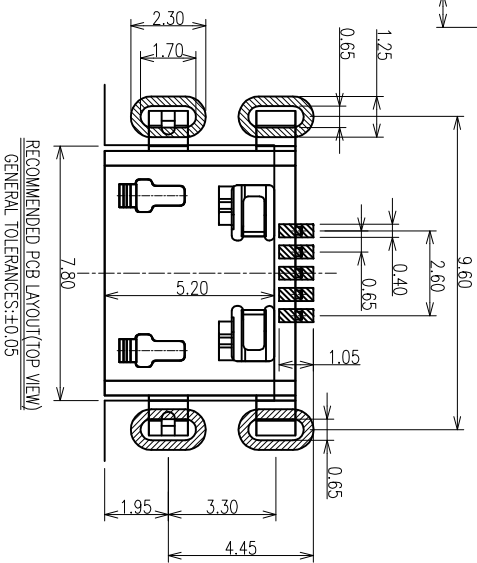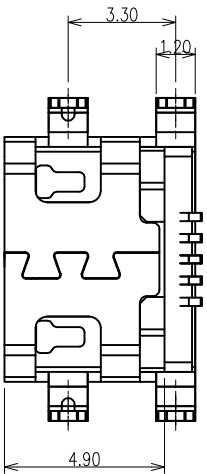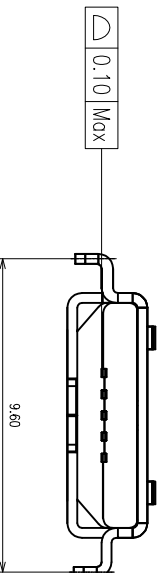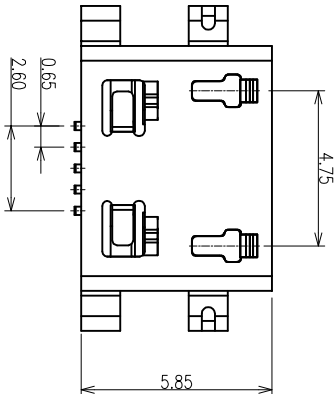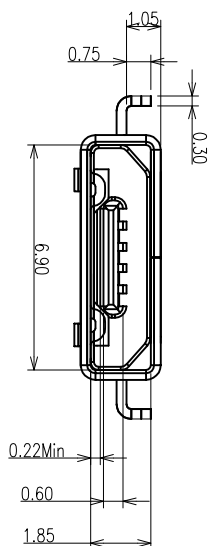

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

### CUSTOMER DRAWING

YTCONN  
<http://www.ytconn.com>

Dongguan YTCONN  
Electronics Technology Co., Ltd.

### GENERAL TOLERANCE

X. ±0.20  
XX ±0.15  
XXX ±0.10

### DRAWING

DEV1

TITLE:

MICRO USB 5P AB type  
沉板1.05四面无翻边

### APPROVED

P/N:

MU13-05AB05-03

### DATE

2014. 07. 14

DRAWING NO.

C-MU13-03

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
3	SHELL	SUS304 1/2H T=0.30mm	TiN/Ni Plated	1PCS
2	CONTACT	C2680R-EH T=0.15mm	Au/Ni Plated	1SET
1	HOUSING	PA9T UL94V-0	BLACK	1PCS



UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 1

REV

A