

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012\04\26

- NOTES 1:
- 1.0 RATING.
 - 1.1 VOLTAGE:100 VAC (rms)
 - 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
 - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
 - 2.0 ELECTRIC CHARACTERISTIC:
 - 2.1 CONTACT RESISTANCE:100mΩ MAX.
 - 2.2 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 - 3.0 OPERATION LIFE: 5000 CYCLES
 - 4.0 MATERIAL/FINISH:SEE TABLE A

PRODUCT NO.

TF03 - 08 A B 05 - 09
① ② ③ ④

- ① 产品系列:
TF03-T-FLASH CARD 简易式 H=3.75MM
- ② 产品PIN数:
08: 8PIN
- ③ 塑胶材料:
A: LCP BLACK
- 4 流水码:
09: H=3.75MM无检测PIN






TABLE A:

3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATING AREA Au PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	
ITEM	NAME	Q' TV/EACH	MATERIAL/FINISHED	REMARK

CUSTOMER DRAWING

YTCONN
Dongguan YTCONN Electronics Technology Co., Ltd
<http://www.hnytconn.com>

GENERAL TOLERANCE	DRAWING	DEV1	TITLE:	T-FLASH CARD CONNECTOR
X. ±0.20	APPROVED		H=3.75MM无检测PIN	
XX ±0.15			P/N:	TF03-08AB05-09
XXX ±0.10	DATE	2014. 12. 30	DRAWING NO.	C-TF03-09
ANGEL TOLERANCE				
X. ±3°				
XX ±2°				
XXX ±1°				

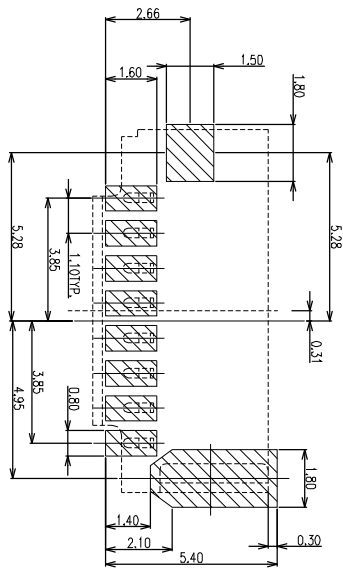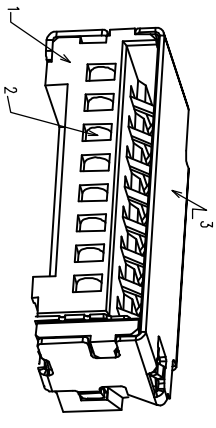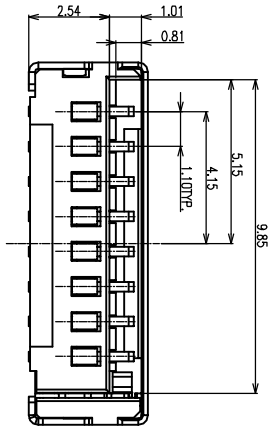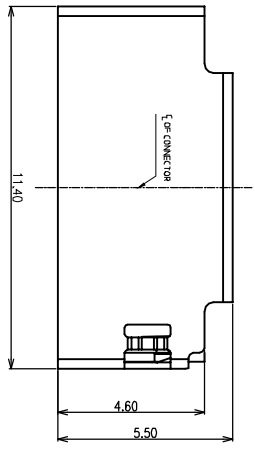

RECOMMENDED PCB LAYOUT
TOLERANCES ±0.05