
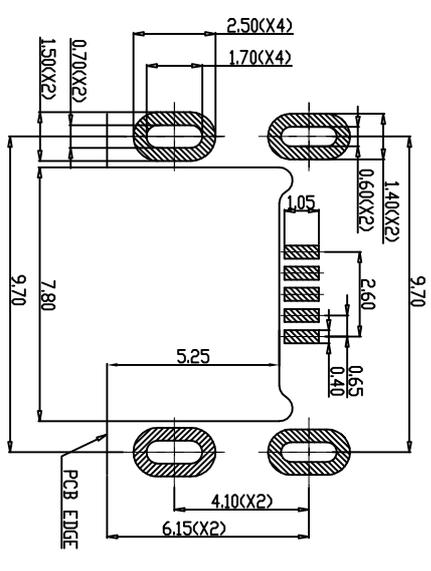
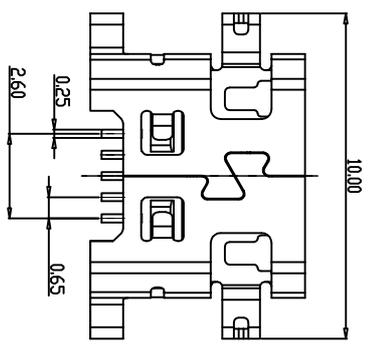

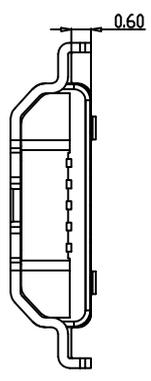

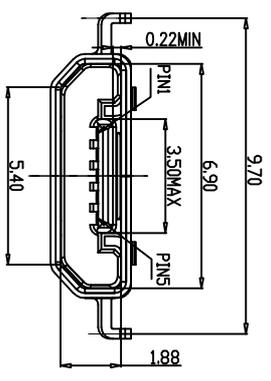


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.11.05

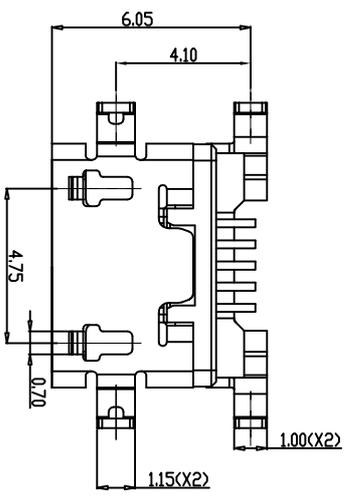

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:F0.05

NOTES:
SPECIFICATION:
1.1 CURRENT RATING: 1.0A MAX
1.2 VOLTAGE: 100 VAC
1.3 TEMPERATURE RANGE: -30 °C ~ 85 °C
1.4 CONTACT RESISTANCE: 30 MILLIONHM MAX
1.5 DIELECTRIC WITHSTANDING VOLTAGE: 200 VAC r.m.s
1.6 INSULATION RESISTNACE: 100 MEGOHMS MIN.

PRODUCT NO.

MU15 - 05 A B 05 -02

- ①
- ②
- ③
- ④

- ① 产品系列:
MU15: 反向MICRO USB 连接器
- ② 产品PIN数:
05: 5PIN
- ③ 主体材质:
A: PA9T
- ④ SERIES NO. :
02: 反向沉板0.6 四脚插板无翻边

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1PCS
2	HOUSING	High temperature plastic	BLACK	1SET
1	SHELL	STAINLESS STEEL T=0.30mm	MATTE TIN/Ni Plated	1PCS

YTCOON
Dongguan YTCOON
Electronics Technology Co., Ltd

CUSTOMER DRAWING

GENERAL TOLERANCE	DRAWING	DEY1	TITLE:
X ±0.20	APPROVED		MICRO USB 5P
XX ±0.15			反向沉板0.6无翻边(结构一成品)
XXX ±0.10			
ANGEL TOLERANCE	DATE	2015. 12. 04	
X ±3°			
XX ±2°			
XXX ±1°			

UNIT	SCALE	SIZE	A4	SHEET	1of1	REV	A
mm	1:1						

A B C D E F G

1 2 3 4 5 6 7 8 9 10