
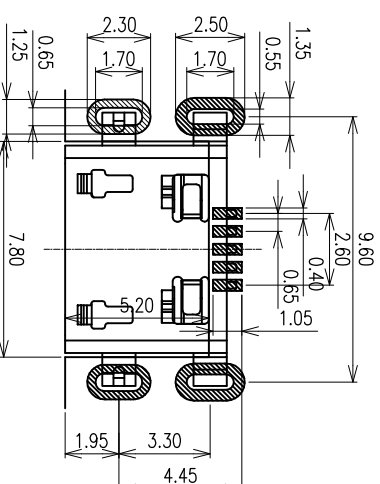
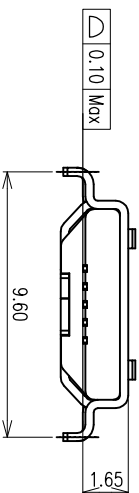
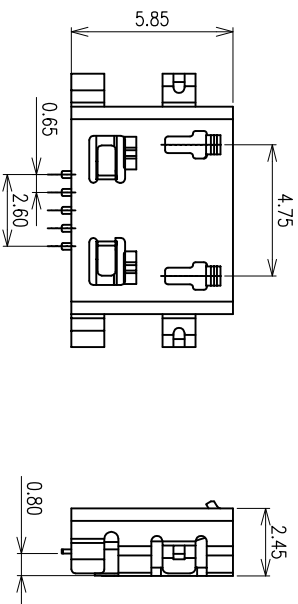


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.06.28

NOTES:

1. CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 30 MILLIONHM MAX.
5. DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
6. INSULATION RESISTANCE: 100 MEGOHMS MIN

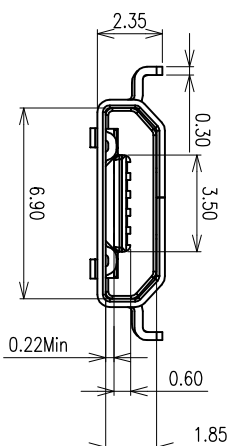

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

PRODUCT NO.

MU16 - 05 A B 03 - 00

① ② ③ ④

① 产品系列:

MU16: MICRO USB 连接器带铁片系列

② 产品PIN数:

05: 5PIN

③ 材质:

A: LCP

④ 产品流水码:

00: 沉板0.8四脚全插

4	PLATE	STAINLESS STEEL T=0.10mm	-----	1PCS
3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1PCS
2	HOUSING	LCP UL94V-0	BLACK	1SET
1	SHELL	STAINLESS STEEL T=0.30mm	Au/Ni Plated	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CUSTOMER DRAWING

YTCONN

Dongguan YTCONN Electronics Technology Co., Ltd.

<http://www.ytconn.com>

GENERAL TOLERANCE

X. ±0.20
XX ±0.15
XXX ±0.10

ANGLE TOLERANCE

X. ±3°
XX ±2°
XXX ±1°

DRAWING

DEV1

APPROVED

P/N:

DATE

2015. 11. 17

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 1

REV

A

MICRO USB 5P
沉板0.8 四脚插板-带铁片

MU16-05AB03-00

C-MU16-00