
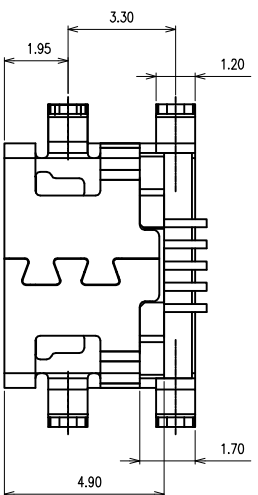
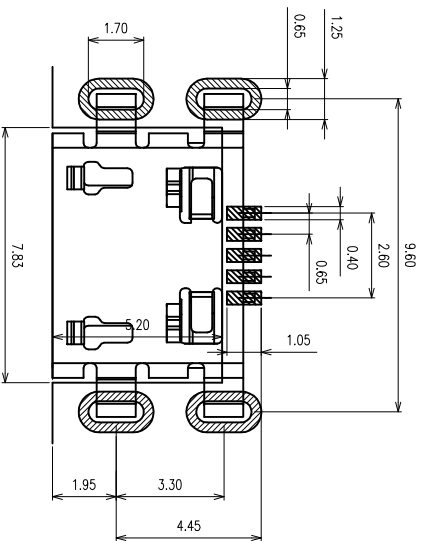
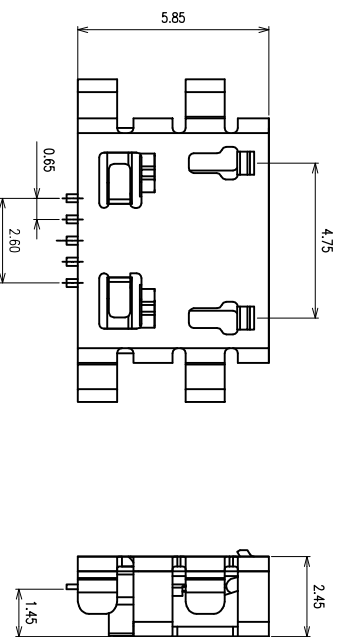


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.04.26

SPECIFICATIONS

- VOLTAGE RATING: 30V AC
- CURRENT RATING: WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS: 1.0A FOR TERMINAL NO.2,3 AND 4) WHEN APPLYING CURRENT ONLY TO POWER TERMINALS: 1.8A FOR TERMINAL NO.1 AND 5) 0.5A FOR TERMINAL NO.2,3 AND 4)
- INSULATION RESISTANCE: 100M MINIAT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 100V/(r.m.s) AC FOR 1 MINUTE
- CONTACT RESISTANCE: 30m MAX.
- OPERATING TEMPERATURE: -30 TO +80?

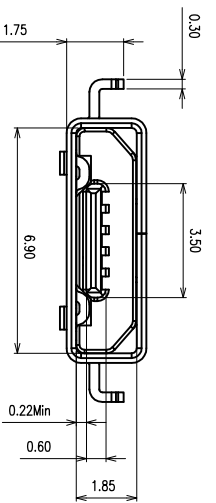

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES: ±0.05

PRODUCT NO.

MU13 - 05 A B 05 - 04

- ①
- ②
- ③
- ④

① 产品系列:

MU13: MICRO USB 5PIN RECEPTACLE

② 产品PIN数:

05: 5PIN

③ 材质:

A: LCP

④ 产品流水码:

04: 沉板1.45 DIP AB TYPE 无翻边



Dongguan YTCOON Electronics Technology Co., Ltd

CUSTOMER DRAWING

GENERAL TOLERANCE
X .F0.20
XX ±0.15
XXX ±0.10

TITLE: MICRO USB 5P AB type
沉板1.45 四脚插板 四面无翻边

ANGEL TOLERANCE
X ±.3°
XX ±2°
XXX ±1°

DRAWING DEY1

P/N: MU13-05AB05-04

DRAWING NO. C-MU13-04

DATE 2014.08.12

DRAWING NO. C-MU13-04

APPROVED

UNIT mm SCALE 1:1 SIZE A4 SHEET 1of1 REV A

NO. 1 SHELL SUSS304 1/2H T=0.30mm CONTACT C2680R-EH T=0.15mm HOUSING PART U194V-0 DESCRIPTION MATERIAL REMARKS BLACK

1PCS 1SET 1PCS QTY

TIN/NI Plated Au/NI Plated

3 2 1

1 2 3 4 5 6 7 8 9 10

A B C D E F G