
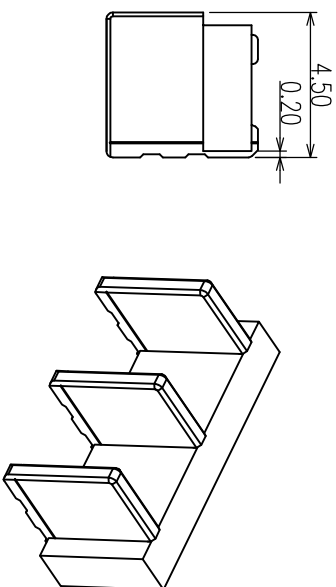


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/4/24



- NOTES:
- CONTACT CURRENT RATING: 1.0A.
  - CONTACT RESISTANCE: 50 m $\Omega$  MAX.;
  - INSULATION RESISTANCE: 1000 $\Omega$  MIN.;
  - DIELECTRIC WITHSTANDING: 300V AC MIN.;
  - DURABILITY: 5,000 CYCLES MIN.;
  - CONNECTOR MATING FORCES: 29.8N (3.00Kg $f$ ) MAX.;
  - CONNECTOR UNMATING FORCES: 3N(0.31Kg $f$ ) MIN.;
  - PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

PRODUCT NO.

BT08-03 A B 10-06

① ② ③ ④

PRODUCT SERIES:

① BT08: 3pin 刀式 电池连接器 N95

② PIN NO.:

03: 3PIN

③ MATERIAL:

A: LCP

④ SERIES NO.:

06: H=4.5mm







TABLE A:

MATTER	RoHS ( PPM )
Cd	$\leq 100$
Pb	$\leq 1000$
Hg	$\leq 1000$
Cr6+	$\leq 1000$
PBB	$\leq 1000$
PBDE	$\leq 1000$

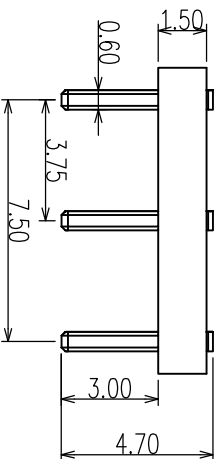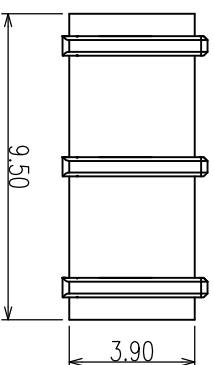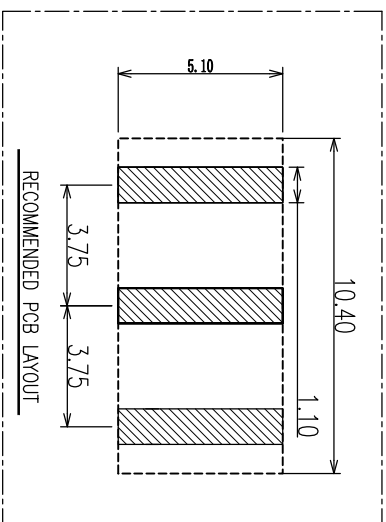

②	HOUSING	1	LCP+30%G.F		BLACK
①	CONTACT A	3	PHONPHOR BRONZE 0.60T	Gold Flash	
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK
<p><b>CUSTOMER DRAWING</b></p> <p><b>YTCONN</b> <a href="http://www.hnytconn.com">http://www.hnytconn.com</a></p> <p><b>Dongguan YTCONN Electronics Technology Co., Ltd.</b></p>					
GENERAL TOLERANCE		DRAWING		TITLE:	
X	$\pm 0.20$	DEYI		BATTERY 3PIN CONNECTOR H4.5 (NOKIA N95)	
.XX	$\pm 0.15$	APPROVED		P/N:	
.XXX	$\pm 0.10$	DATE		BT08-03AB10-06	
ANGEL TOLERANCE		DATE		DRAWING NO.	
X	$\pm 3^\circ$	2015. 11. 26		C-BT08-06	
.XX	$\pm 2^\circ$	UNIT	mm	SCALE	1:1
.XXX	$\pm 1^\circ$	SIZE	A4	SHEET	1of1
<p>REV A</p>					