

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY		2012/4/24

NOTES :

- 1.0. RATING :
- 1.1. Operating voltage : 250 VAC MIN
- 1.2. Operating current : 2.0 AMPERE MIN
- 1.3. TEMPERATURE : -55°C TO +125°C
- 2.0. ELECTRICAL CHARACTERISTIC :
- 2.1. CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL
- 2.2. INSULATION RESISTANCE :500 MEGOHMS MINIMUM
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0. MATERIALS :
- 3.1. CONTACT : COPPER ALLOY
- 3.2. HOUSING : THERMOPLASTIC, GLASS FILLED, 130°C, UL 94V-0 RATED

PRODUCT NO.

BT08-03 A B 10-00

- ①
- ②
- ③
- ④

PRODUCT SERIES:

- ① BT08:3PIN BATTERY 4.8h

- ② PIN NO. :





03 : 3PIN

- ③ MATERIAL:

A : LCP

- ④ SERIES NO. :

00 : H=4.8MM

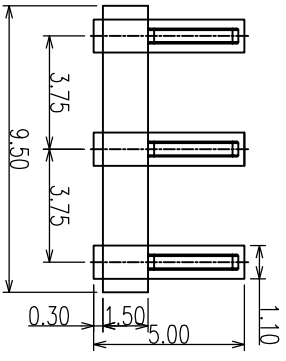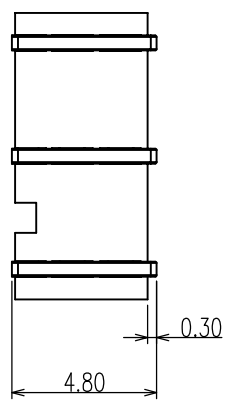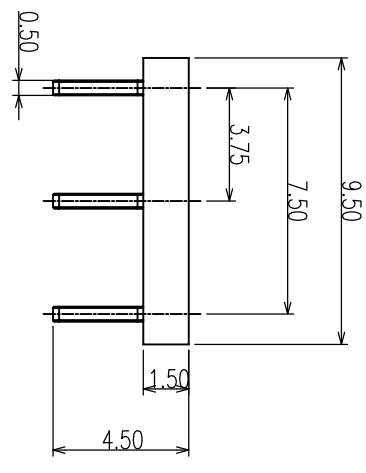

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

CUSTOMER DRAWING		YTCONN <small>http://www.ytconn.com</small>		Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE		DRAWING	DEVT	TITLE	
X	±0.20	DATE	2012. 04. 24	P/N:	3PIN 刀片式 电池连接器 (NOKIA N95) H=4.8mm
XX	±0.15	APPROVED		DRAWING NO.	BT08-03AB10-00
XXX	±0.10	UNIT	mm	SCALE	1:1
ANGEL TOLERANCE		SCALE		SHEET	1 of 1
X	±3°	SIZE	A4	REV	A
XX	±2°				
XXX	±1°				