


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.09.14

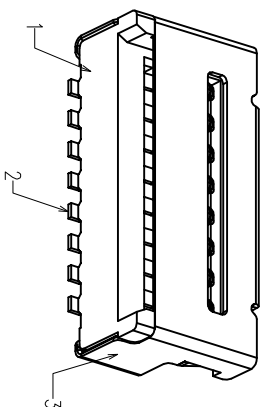

- NOTES 1:
- 1.0 RATING.
  - 1.1 VOLTAGE:100 VAC (rms)
  - 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
  - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
  - 2.0 ELECTRIC CHARACTERISTIC:
  - 2.1 CONTACT RESISTANCE:100m $\Omega$ 2. MAX.
  - 2.2 INSULATION RESISTANCE: 1000M $\Omega$
  - 2.3 DIELECTRIC WITHSTANDING
  - VOLTAGE:500V AC FOR 1 MINUTE
  - 3.0 OPERATION LIFE: 5000 CYCLES
  - 4.0 MATERIAL/FINISH:SEE TABLE A

Connector Pin Ass

PIN NO.	PIN NUMBER
P1	DATA2
P2	CD/DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DATO
P8	DAT1
G1	GND
G2	GND

PRODUCT NO.

TF03 - 08 A B 05- 10  
① ② ③ ④

① 产品系列:  
TF03-T-FLASH CARD 简易式

② 产品PIN数:  
08: 8PIN

③ 塑胶材料:  
A: LCP BLACK

④ 流水码:  
10: H-3.0MM,无波测端

TABLE A:

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATING AREA AU PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	

**CUSTOMER DRAWING**

**YTCONN**

*Dongguan YTCONN Electronics Technology Co., Ltd.*

GENERAL TOLERANCE

X.  $\pm 0.20$   
XX  $\pm 0.15$   
XXX  $\pm 0.10$

ANGLE TOLERANCE

X.  $\pm 3^\circ$   
XX  $\pm 2^\circ$   
XXX  $\pm 1^\circ$

DRAWING

DEV1

TITLE:

T-FLASH CARD CONNECTOR

APPROVED

P/N:

TF03-08AB05-10

DATE

2015. 12. 05

DRAWING NO. C-TF03-10



UNIT mm

SCALE

1:1

SIZE

A4

SHEET

1 of 2

REV

A