


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.06.28

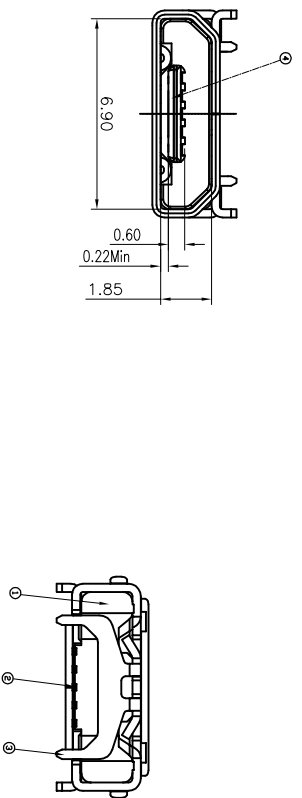

- NOTES:
- CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
 - VOLTAGE: 30 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
 - INSULATION RESISTANCE: 100 MEGOHMS MIN

PRODUCT NO.
 MU16 - 05 A B 03 - 02
 ① 产品系列: MICRO USB 连接器带铁片系列
 ② 产品PIN数: 05: 5PIN
 ③ 材质: A: LCP
 ④ 产品流水号: 02: 7.2mm间距全镀边

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	PLATE	STAINLESS STEEL T=0.10mm	----	IPCS
3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	IPCS
2	HOUSING	High temperature plastic	BLACK	ISEI
1	SHELL	STAINLESS STEEL T=0.30mm	Au/Ni Plated	IPCS

CUSTOMER DRAWING
YTCONN
 Dongguan YTCOON Electronics Technology Co., Ltd.
<http://www.ytconn.com>

GENERAL TOLERANCE	DRAWING	DEV1	TITLE:	MICRO USB 5P 全镀边无翻边(带铁片)
X ±0.20	APPROVED		P/N:	MU16-05AB03-02
XX ±0.15	DATE	2015. 11. 17	DRAWING NO.	C-MU16-02
XXX ±0.10	UNIT	mm	SCALE	1:1
ANGEL TOLERANCE	SIZE	A4	SHEET	1of1
X ±3°	REV	A		
XX ±2°				
XXX ±1°				

RECOMMENDED PCB LAYOUT(TOP VIEW)
 GENERAL TOLERANCES:±0.05