
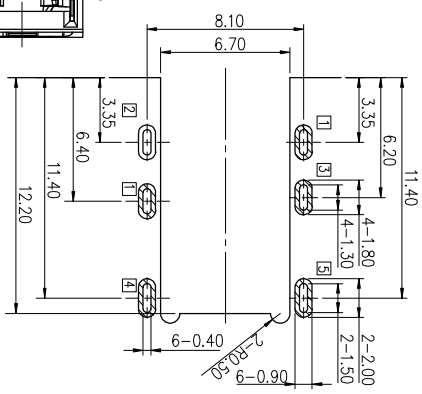

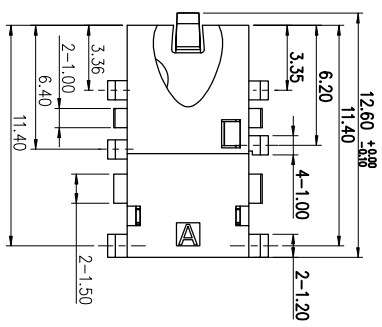



REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

PLUG 完全插入后, 2.00 ±0.20
CONN. 前端与PLUG 根部尺寸



- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 1000Ω MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.;

PRODUCT NO.

PJ24-06 A B 03-00
① ② ③ ④

① PRODUCT SERIES:
PJ24: PHONE JACK CONNECTOR slim 2.7mm type.

② PIN NO.:





06: 6PIN

③ MATERIAL:

A: LCP

④ SERIES NO.:

00: 斜口, 反插型

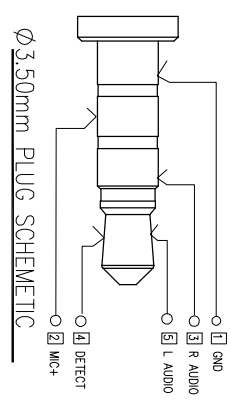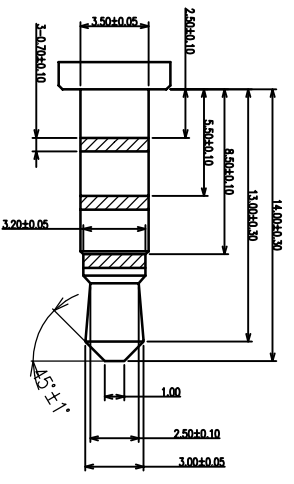

PLUG SPEC

CUSTOMER DRAWING

YTCOMM
Dongguan YTCOMM Electronics Technology Co., Ltd

GENERAL TOLERANCE	DRAWING	DEVI	TITLE
X ±0.20			PHONE JACK CONNECTOR slim 2.7mm
.XX ±0.15	APPROVED		P/N: PJ24-06AB03-00
.XXX ±0.10	DATE	2013.10.05	DRAWING NO. C-PJ24-00
ANGEL TOLERANCE			
X ±3°	UNIT	mm	SCALE
.XX ±2°			1:1
.XXX ±1°			SIZE
			A4
			SHEET
			1of1
			REV
			A