
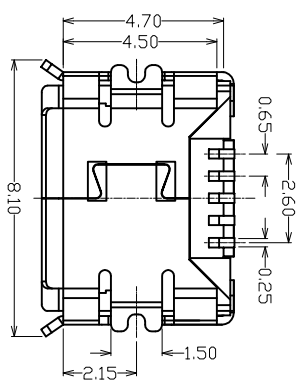

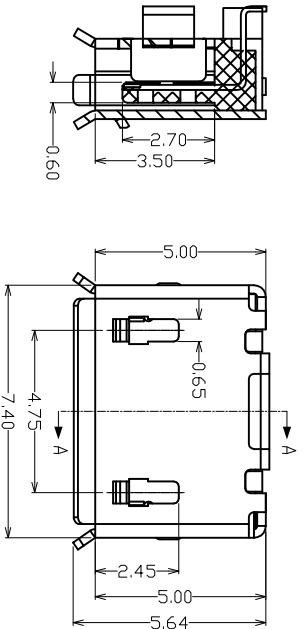


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			



- NOTES:
1. MATERIAL:  
A. PIN&SHELL: ALLOY COPPER  
B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS  
UL94V-0, BLACK.
  2. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 250 VAC MIN  
CURRENT RATING: 2.0 A MIN  
DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN  
INSULATION RESISTANCE: 100 MEG OHM MIN  
CONTACT RESISTANCE: 100 MILLIOHM MAX  
OPERATION TEMPERATURE: -55ï¿½ TO +125ï¿½
  3. MECHANICAL SPECIFICATIONS:  
4.1 DURABILITY: 5,000 CYCLES  
4. THE DIMENSION MARKED NO. SHOULD BE CHECKED IN PRODUCTION.
  5. MATERIAL SHOULD BE FULFILLED ROHS REQUIREMENTS.

PRODUCT NO.

MU05 - 05 A B 05 - 08

① ② ③ ④

- ① 产品系列:  
MU05: MICRO USB 连接器
- ② 产品PIN数:  
05: 5PIN  
A: LCP
- ③ 主体材质:  
A: LCP
- ④ SERIES NO. :  
08: 垫高0.9mm

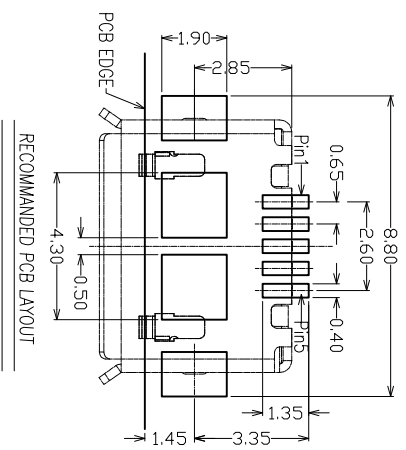
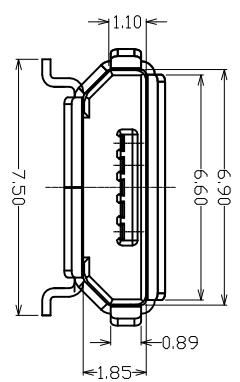


TABLE A:

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
3	SHELL	1	ALL Tin PLATED	
2	HOUSING	1	Thermoplastic UL94V-0, BLACK	
1	CONTACT	5	Au PLATED OVER Sn PLATED	

CUSTOMER DRAWING

YTCONN

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE	DRAWING	DEVT	TITLE
X. $\pm 0.20$ .XX $\pm 0.15$ .XXX $\pm 0.10$	APPROVED		MICRO USB CONNECTOR 垫高0.9mm
ANGEL TOLERANCE X. $\pm 3^\circ$ .XX $\pm 2^\circ$ .XXX $\pm 1^\circ$	DATE	2012. 04. 26	DRAWING NO. C-MU05-08
	UNIT	mm	SCALE 1:1
	SIZE	A4	SHEET 1 of 1
	REV	A	