


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		


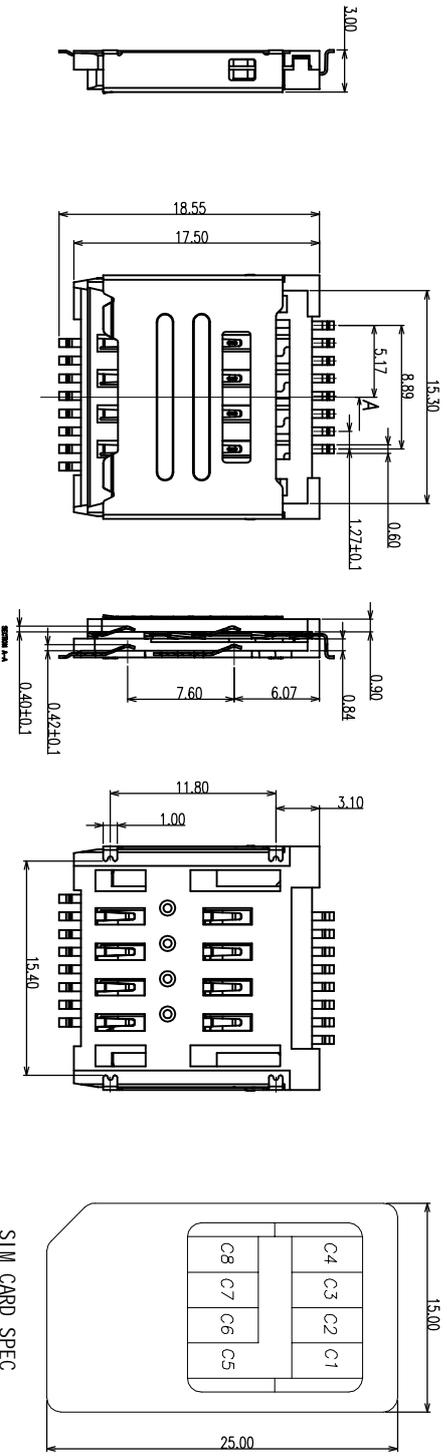


SIM CARD SPEC

- NOTES:
- 1.0 RATING.
 - 1.1 VOLTAGE:12 VAC (rms) MIN.
 - 1.2 CURRENT: 1 AMPERES MAX. PER CONTACT
 - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+70°C
 - 2.0 ELECTRIC CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE:60mΩ MAX.
 - 2.2 INSULATION RESISTANCE: 1000M Ω
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 - 3.0 OPERATION LIFE: 5000 CYCLES
 - 4.0 MATERIAL/FINISH:SEE TABLE
 - 5.0 CONTACT PIN ASSIGNMENT:SEE TABLE

料号编码

- SM09 - 16 C B 09 - 01
- ① 产品系列: SM09: 双层SIM卡连接器
 - ② 产品PIN数: 16: 16PIN
 - ③ 塑胶材料: LCP
 - ④ 塑胶颜色: B: 黑色
 - ⑤ 产品流水号 01: 内样

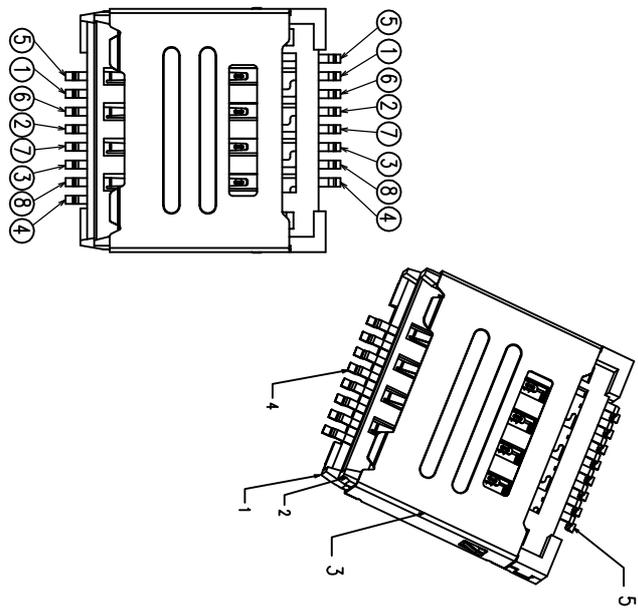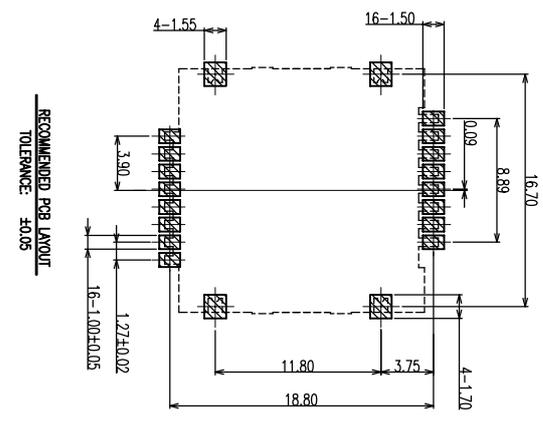

项目	名称	数量/套	MATERIAL/FINISHED
5	下端子	1	COPPER ALLOY
4	上端子	1	COPPER ALLOY
3	铁壳	1	不锈钢
2	上胶芯	1	THERMOPLASTIC, 黑色
1	下胶芯	1	THERMOPLASTIC, 黑色

YTCOON
Dongguan YTCOON
Electronics Technology Co., Ltd.

CUSTOMER DRAWING

GENERAL TOLERANCE

X	±0.20
.XX	±0.15
.XXX	±0.10
ANGEL TOLERANCE	
X	±3°
.XX	±2°
.XXX	±1°

DRAWING

DEY1	
APPROVED	
DATE	2012.04.26

TITLE: 双层SIM CARD 3.0H 连接器

P/N:	SM09-16CB09-01
DRAWING NO.	C-SM09-01

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A
------	----	-------	-----	------	----	-------	------	-----	---