

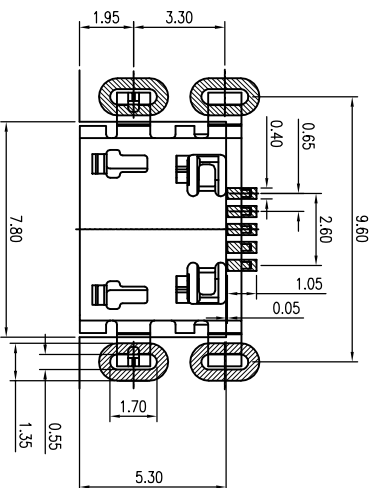
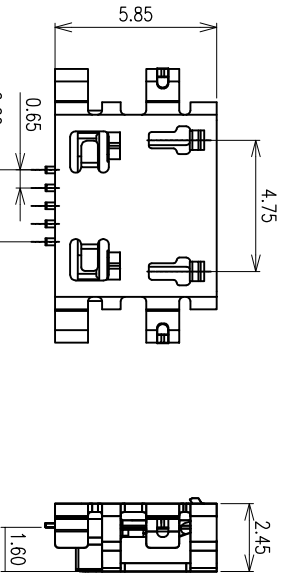


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.06.28

- NOTES:
1. CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
 2. VOLTAGE: 30 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 30 MILLIONHM MAX.
 5. DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
 6. INSULATION RESISTANCE: 100 MEGOHMS MIN

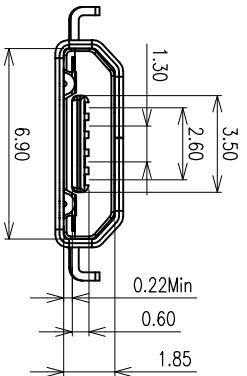

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

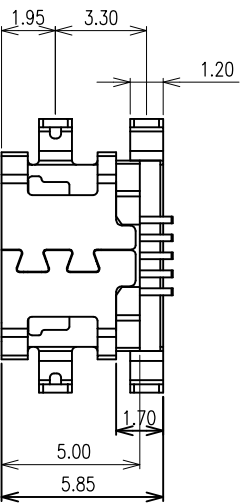

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	PLATE	STAINLESS STEEL T=0.10mm	----	1PCS
3	CONTACT	COPPER ALLOY T=0.15mm	Au / Ni50u"	1SET
2	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK UL94V-0	1PCS
1	SHELL	STAINLESS STEEL T=0.30mm	Au / Ni 50u"	1PCS

CUSTOMER DRAWING

YTCONN
http://www.ytconn.com

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE

X ±0.20
XX ±0.15
XXX ±0.10

DRAWING DEY1

TITLE: MICRO USB 5P 沉板1.6间距板无端子(带铁片)

APPROVED

P/N: MU16-05AB03-01

ANGEL TOLERANCE

X ±.3°
XX ±2°
XXX ±1°

DATE 2015. 11. 17

DRAWING NO. C-MU16-01

PRODUCT NO.

MU16 - 05 A B 03 - 01

① ② ③ ④

① 产品系列:

MU16: MICRO USB 连接器带铁片系列

② 产品PIN数:

05: 5PIN

③ 材质:

A: LCP

④ 产品流水号:

01: 沉板1.6间距全插无端子

