


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			

NOTES:

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 m<sup>2</sup> MAX.;
- INSULATION RESISTANCE: 1000<sup>2</sup> MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
- PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

TABLE A:



PRODUCT NO.

PJ08-06 A B 05-17

① ② ③ ④

① PRODUCT SERIES:

PJ08:PHONE JACK CONNECTOR slim 1.0mm type.

② PIN NO.:

04: 4PIN

06: 6PIN




③ MATERIAL:

A: PA9T

④ SERIES NO.:

17:斜口前插后贴,3#锡脚位距离前端9.30mm

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

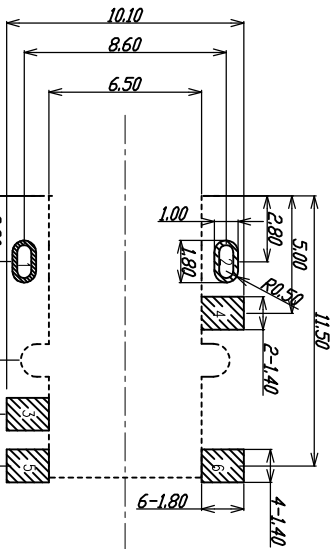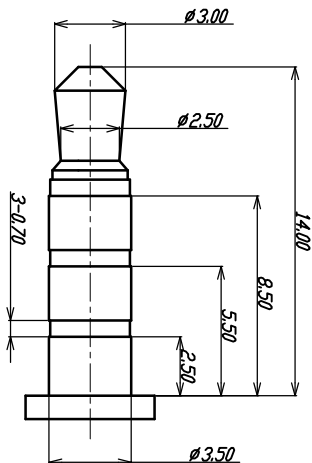

CUSTOMER DRAWING

YTCONN

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE

X. ±0.20  
.XX ±0.15  
.XXX ±0.10

ANGEL TOLERANCE

X. ±5°  
.XX ±2°  
.XXX ±1°

DRAWING

DEVI

APPROVED

DATE

2014. 07. 03

TITLE:

PHONE JACK CONNECTOR  
slim 1.0mm L=12 斜口前插后贴

P/N:

PJ08-06AB05-17

DRAWING NO.

C-PJ08-17

UNIT mm

SCALE

1:1

SIZE

A4

SHEET

1of2

REV

A