


REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 m² MAX.;
 - INSULATION RESISTANCE: 1000² MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
 - PRODUCT MEET THE REQUEST OF THE ROHS, SEE TABLE A:

TABLE A:



PRODUCT NO.

PJ08-06 A B 05-12

- ①
- ②
- ③
- ④

① PRODUCT SERIES:

PJ08:PHONE JACK CONNECTOR slim 10mm type.

② PIN NO.:

04: 4PIN

06: 6PIN

③ MATERIAL:

A: PA9T

④ SERIES NO.:

12: L=12.8mm 前后插板中间贴板


YTCOON

Dongguan YTCOON Electronics Technology Co., Ltd.

CUSTOMER DRAWING

GENERAL TOLERANCE	DRAWING	DEV1	TITLE:
X: ±0.20			PHONE JACK CONNECTOR
.XX: ±0.15	APPROVED		slim 10mm L=12.8mm 前后插板中间贴板
.XXX: ±0.10			P/N: PJ08-06AB05-12
ANGEL TOLERANCE	DATE	2013. 06. 05	DRAWING NO.
X: ±5°			C-PJ08-12
.XX: ±2°			
.XXX: ±1°			

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of2	REV	A
------	----	-------	-----	------	----	-------	------	-----	---

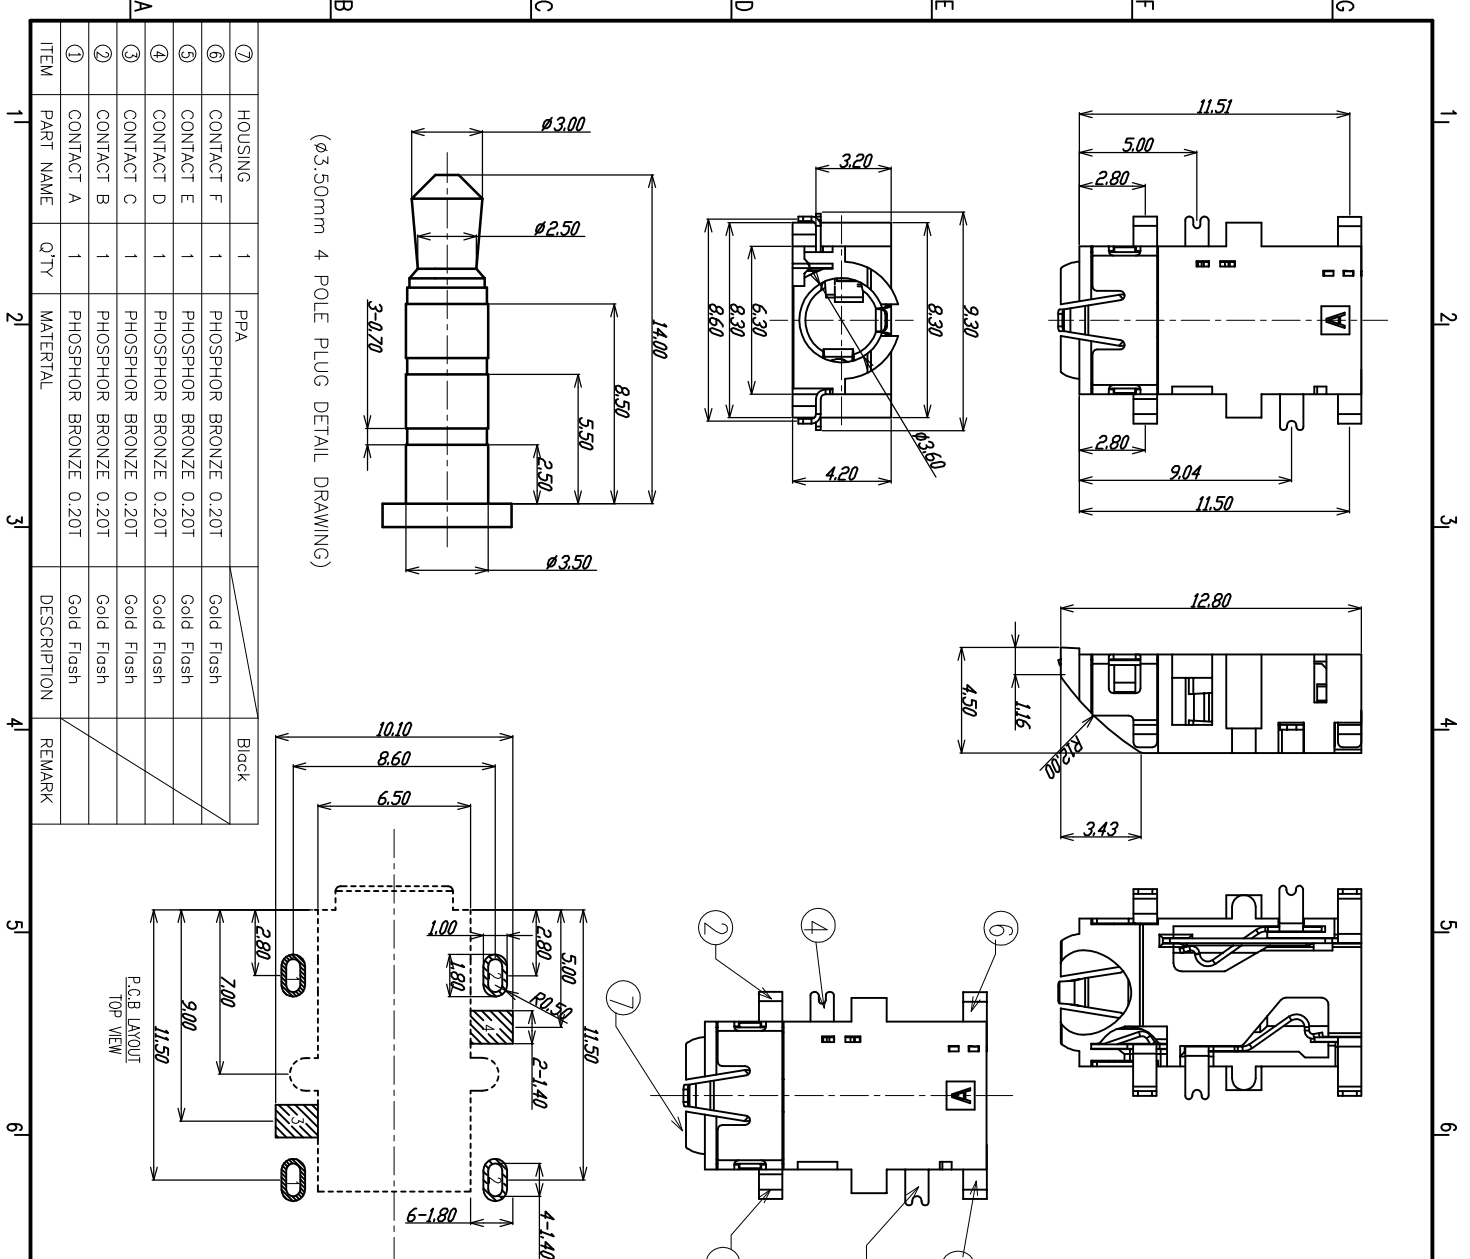

ITEM	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑦	HOUSING	1	PPA	Gold Flash	Block
⑥	CONTACT F	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	