

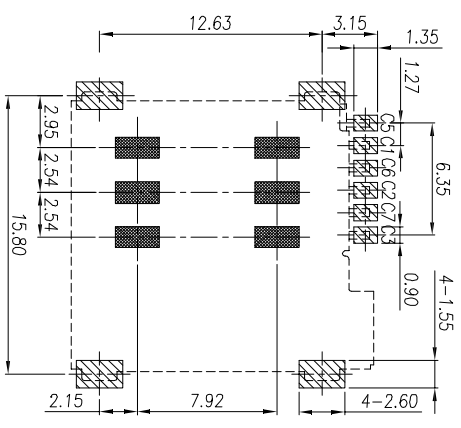

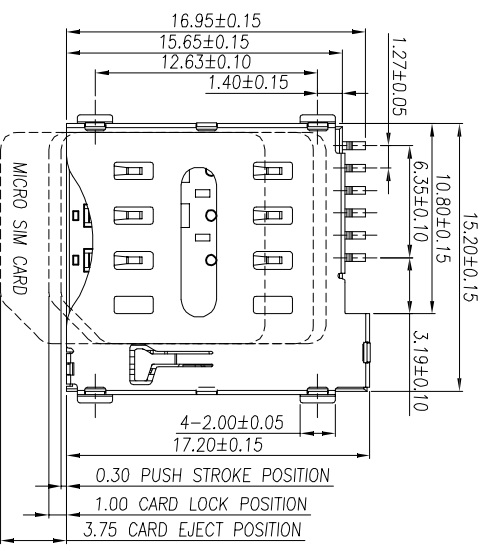




REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEVI		



■ CIRCUIT TRACE KEEP OUT AREA
 ▨ SMT SOLDER AREA
 THERE SHOULD NOT BE ANY CIRCUITRIES
 IN THE LAYOUT SPACE OF THE PRODUCTS.
 RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05



C1:VCC
 C2:RST
 C3:CLK
 C4:RESERVED
 C5:GND
 C6:VPP
 C7:I/O
 C8:RESERVED

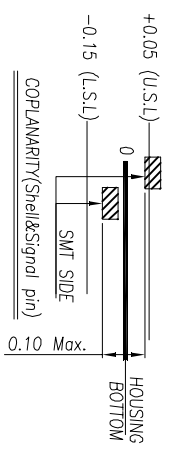

- NOTES:
- MATERIAL:
 - HOUSING:THERMOPLASTIC,UL 94V-0;COLOR:BLACK
 - SLIDE:HERMOPLASTIC,UL 94V-0;COLOR:BLACK
 - SHIELDED:STAINLESS STEEL
 - CONTACT:COOPER ALLOY
 - CAM ROD AND SPRING :STAINLESS STEEL
 - FINISH:
 - CONTACT: Au PLATING ON CONTACT AREA (SEE P/N DESCRIPTION)
 - MIN NICKEL UNDERPLATING OVER ALL 100μ MIN WATE TIN PLATING ON SOLDER AREA, 50μ MIN NICKEL UNDERPLATING ON SECURED AREA
 - PRODUCT SPECIFICATIONS:
 - VOLTAGE RATING: 50V
 - WITHSTANDING VOLTAGE: AC250V R.M.S
 - CURRENT RATING: 0.5A
 - INSULATION RESISTANCE: 1000MΩ·OHM MIN AT DC 250V
 - CONTACT RESISTANCE: 100 MΩ·OHM MAX
 - OPERATION TEMPERATURE: -20° TO +85°
 - DURABILITY: 3000 CYCLES

料号编号

SM32-06A B 05-00

- ① 产品系列: SM32:SIM卡连接器
- ② 产品代码: 06: 6PIN
- ③ 塑胶材料: A: LCP
- ④ 塑胶颜色: B: 黑色
- ⑤ 产品流水号: 00:SIM CARD 1.35h W/O SWITCH

CUSTOMER DRAWING		YTCONN		Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE		DRAWING		TITLE:	
X	±0.20	DEVI		SIM CARD 1.35H W/O SWITCH	
.X	±0.15	APPROVED		P/N:	
.XX	±0.10	DATE		SM32-06AB05-00	
.XXX	±0.10	2012.08.25		DRAWING NO. C-SM32-00	
ANGEL TOLERANCE		UNIT		SCALE	
X	±3°	mm		1:1	
.XX	±2°	mm		A4	
.XXX	±1°	mm		SHEET 1 of 1	
		REV		A	