


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/09/28

NOTES:

- 1)MATERIAL:
HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK
CONTACT: COPPER ALLOY
2)FINISH
CONTACT: GOLD FLASH
3)PRODUCT SPECIFICATIONS:
3-1 WITHSTANDING:500V AC /MINUTE
3-2 CONTACT RESISTANCE:30 milliohm(INITIAL) Max.
3-3 INSULATION RESISTANCE:100MEGohm Min
3-4 INSERTION FORCE:2.22Kg Max (INITIAL)
3-5 WITHDRAWAL FORCE:0.22Kg Min (INITIAL)
3-6 DURABILITY:5000 CYCLES

PRODUCT NO.


- PJ15-06 A B 07-01
① ② ③ ④
① PRODUCT SERIES:
PJ15: PHONE JACK CONNECTOR压接式
② PIN NO.:
06: 6PIN
③ MATERIAL:
A: PA9T
④ SERIES NO.:
01:4.25H,大斜度插口

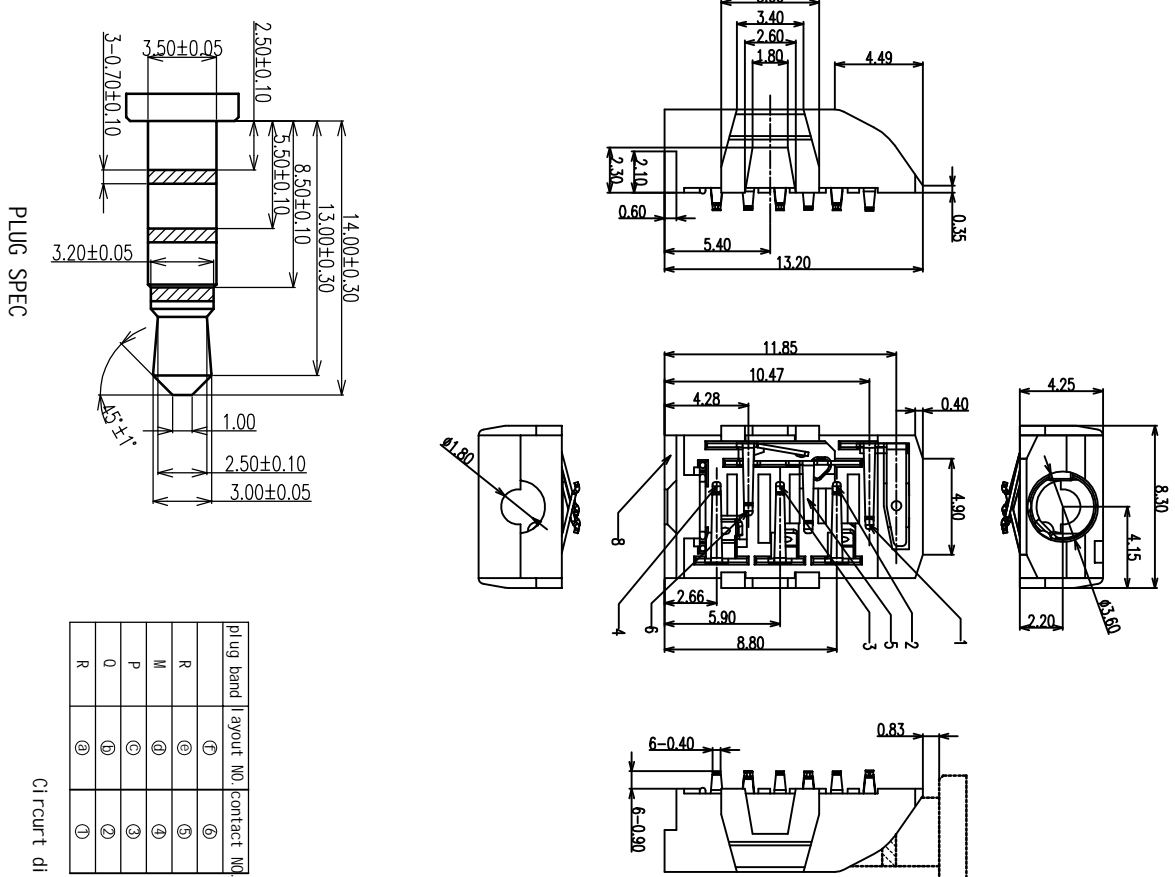

PLUG SPEC

Circuit diagram

plug band	layout NO	contact NO
R	⑦	⑥
M	⑧	⑤
P	⑨	④
O	⑩	③
R	⑪	②



YTCOON
Dongguan YTCOON
Electronics Technology Co., Ltd.

CUSTOMER DRAWING		YTCOON	
GENERAL TOLERANCE	DRAWING	DEV1	TITLE:
X. ±0.20	APPROVED		PHONE JACK CONNECTOR 压接式
.XX ±0.15			P/N:
.XXX ±0.10	DATE	2012. 11. 16	DRAWING NO.
ANGEL TOLERANCE			C-PJ15-01
X. ±3°			
.XX ±2°			
.XXX ±1°			

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1 of 1	REV	A
------	----	-------	-----	------	----	-------	--------	-----	---