

| REV | ECON # | DESCRIPTION | DRAWING | APPROVED | DATE |
|-----|--------|-------------|---------|----------|------------|
| A | | NEW RELEASE | DEV1 | | 2012/05/25 |
| | | | | | |

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 1000 Ω MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.;









TABLE A

| 项目 | 产号料号 | DIM. A | 备注 |
|----|----------------|--------|--------------|
| 3 | PJ25-06A905-02 | 1.4 | 沉板1.4(斜角28度) |
| 2 | PJ25-06A905-01 | 1.0 | 沉板1.0(斜角28度) |
| 1 | PJ25-06A905-00 | 0.8 | 沉板0.8(斜角28度) |

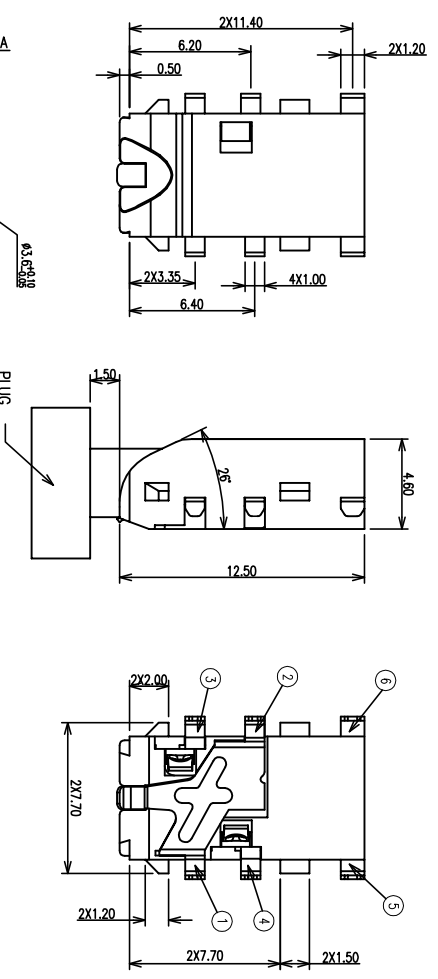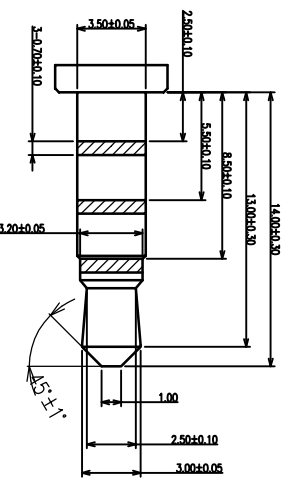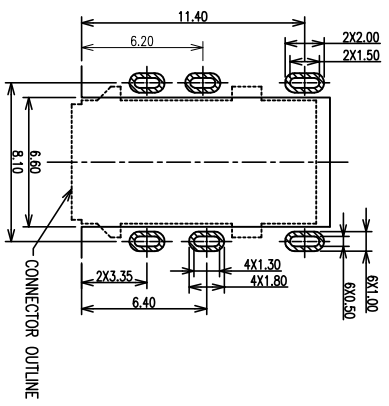

- PRODUCT NO. _____
- PJ25-06 A B 03-XX
- ① PRODUCT SERIES: PJ25: PHONE JACK CONNECTOR
- ② PIN NO.: 06: 6PIN
- ③ MATERIAL: A: LCP
- ④ SERIES NO.: XX:SEE TABLE A

| | | | | | |
|-------------------------|------------------------------------|---------------|--------------|--|---------------------|
| CUSTOMER DRAWING | | YTCONN | | Dongguan YTCONN Electronics Technology Co., Ltd | |
| GENERAL TOLERANCE | X ±0.20 .XX ±0.15 .XXX ±0.10 | DRAWING | DEV1 | TITLE: | φ3.5 6PIN耳机插座(沉板斜口) |
| ANGEL TOLERANCE | X ±.5° .XX ±.2° .XXX ±1° | APPROVED | | P/N: | PJ25-06AB03-0X |
| | | DATE | 2013. 10. 05 | DRAWING NO. | C-PJ25-00 |
| | | UNIT | mm | SCALE | 1:1 |
| | | SIZE | A4 | SHEET | 1of1 |
| | | REV | A | | |

PLUG SPEC

