

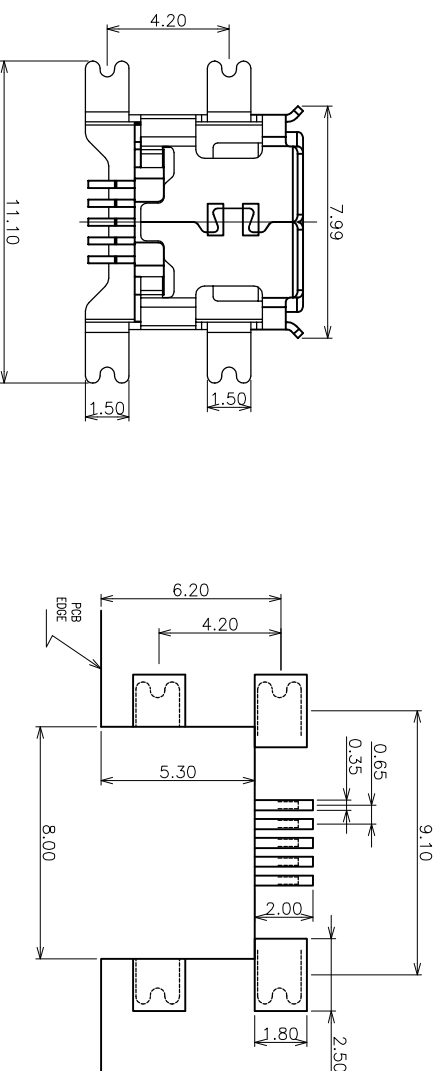

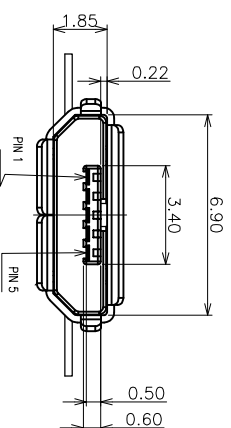


7		8		9		10	
REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE		
A		NEW RELEASE					





NOTES:

1. MATERIAL:
 - A. PIN&SHELL: ALLOY COPPER
 - B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS UL94V-0, BLACK.
2. ELECTRICAL SPECIFICATIONS:
 - VOLTAGE RATING: 250 VAC MIN
 - CURRENT RATING: 2.0 A MIN
 - DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
 - INSULATION RESISTANCE: 100 MEG OHM MIN
 - CONTACT RESISTANCE: 100 MILL.OHM MAX
 - OPERATION TEMPERATURE: -55°C TO +125°C
3. MECHANICAL SPECIFICATIONS:
 - 4.1 DURABILITY: 5,000 CYCLES
 4. THE DIMENSION MARKED No. SHOULD BE CHECKED IN PRODUCTION.
5. MATERIAL SHOULD BE FULFILLED ROHS REQUIREMENTS.

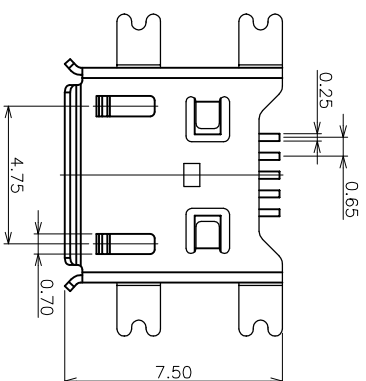

RECOMMEND P.C.B.LAYOUT

<div><div><div>CUSTOMER DRAWING</div><div>YTCONN</div><div><div>Dongguan YTCONN Electronics Technology Co., Ltd.</div><div>http://www.hnytconn.com</div></div></div></div>										
GENERAL TOLERANCE			DRAWING		DEVT		TITLE:			
X.			X ±0.20		MICRO USB CONNECTOR 破板式0.7mm					
.XX ±0.15			APPROVED		P/N:		MU05-05AB05-18			
.XXX ±0.10										
ANGEL TOLERANCE			DATE		2012. 06. 30		DRAWING NO.			
X. ±3°							C-MU05-18			
.XX ±2°										
.XXX ±1°										
			UNIT		mm		SCALE		1:1	
										
			SIZE		A4		SHEET		1 of 1	
			REV		A					