


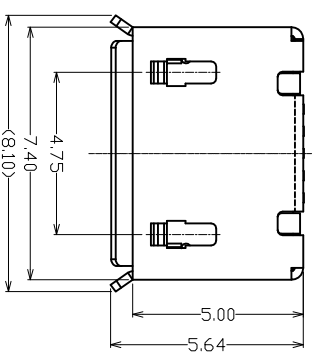



REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			



- NOTES:
- MATERIAL:
    - A. PIN&SHELL: ALLOY COPPER
    - B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS UL94V-0, BLACK.
  - ELECTRICAL SPECIFICATIONS:
    - VOLTAGE RATING: 250 VAC MIN
    - CURRENT RATING: 2.0 A MIN
    - DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
    - INSULATION RESISTANCE: 100 MEG OHM MIN
    - CONTACT RESISTANCE: 100 MILL.OHM MAX
    - OPERATION TEMPERATURE: -55;ïT0 +125;ïT
  - MECHANICAL SPECIFICATIONS:
    - 3.1 DURABILITY: 5,000 CYCLES
  - THE DIMENSION MARKED No. SHOULD BE CHECKED IN PRODUCTION.
  - MATERIAL SHOULD BE FULLILLED ROHS REQUIREMENTS.

PRODUCT NO.

MU05 - 05 A B 05 - 12

- ①
- ②
- ③
- ④

- ① 产品系列: MU05: MICRO USB 连接器
- ② 产品PIN数: 05: 5PIN
- ③ 主体材质: A: LCP
- ④ SERIES NO.: 12:AB TYPE外壳插板

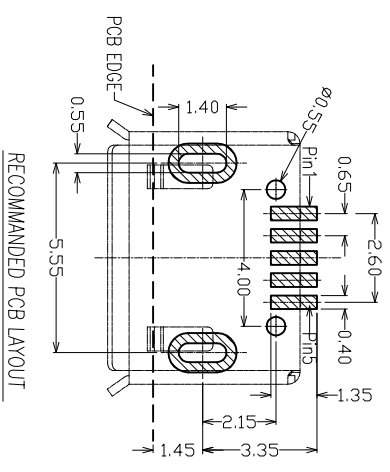



TABLE A:

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
3	SHELL	1	ALL Tin PLATED	
2	HOUSING	1	Thermoplastic UL94V-0, BLACK	
1	CONTACT	5	Au PLATED OVER Sn PLATED	

**YTCOMM**  
Dongguan YTCOMM  
Electronics Technology Co., Ltd.

**CUSTOMER DRAWING**

GENERAL TOLERANCE

X ±0.20

.XX ±0.15

.XXX ±0.10

ANGEL TOLERANCE

X ±3°

.XX ±2°

.XXX ±1°

DRAWING DEVT

APPROVED

DATE 2012. 04. 26

TITLE: MICRO USB CONNECTOR AB TYPE.

带定位柱(外壳插板)

P/N: MU05-05AB05-12

DRAWING NO. C-MU05-12

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1 of 1	REV	A
------	----	-------	-----	------	----	-------	--------	-----	---