

REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A	ECN110001	NEW RELEASE	GF		2011/11/03

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 m² MAX.;
 - INSULATION RESISTANCE: 1000² MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
 - PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

PRODUCT NO.

PJ08-06 A B 05-02

- ① ② ③ ④

① PRODUCT SERIES:

PJ08:PHONE JACK CONNECTOR slim 1.0mm type.

② PIN NO.:

04: 4PIN

06: 6PIN





③ MATERIAL:

A: PA9T

④ SERIES NO.:

02: L=12mm 无头 全贴

02A: L=12mm 无头 全贴反包装

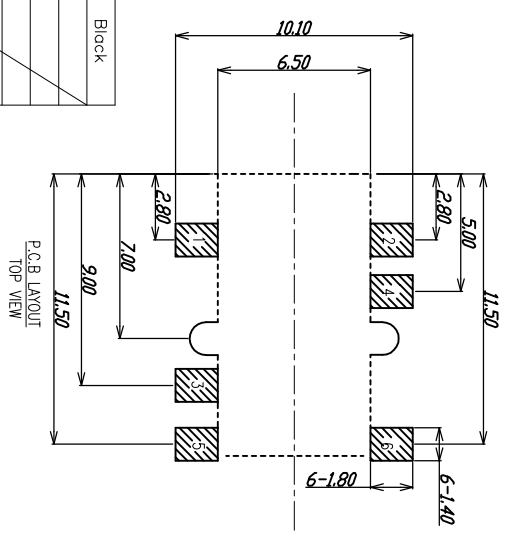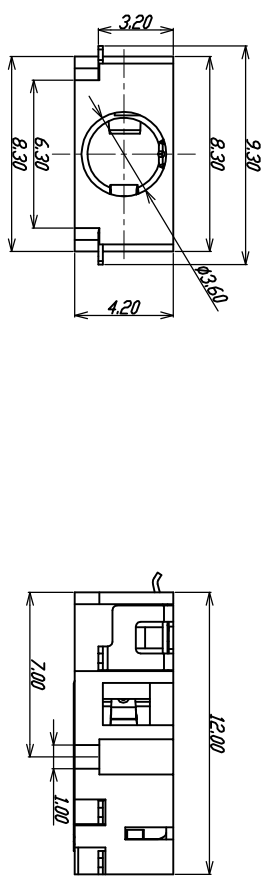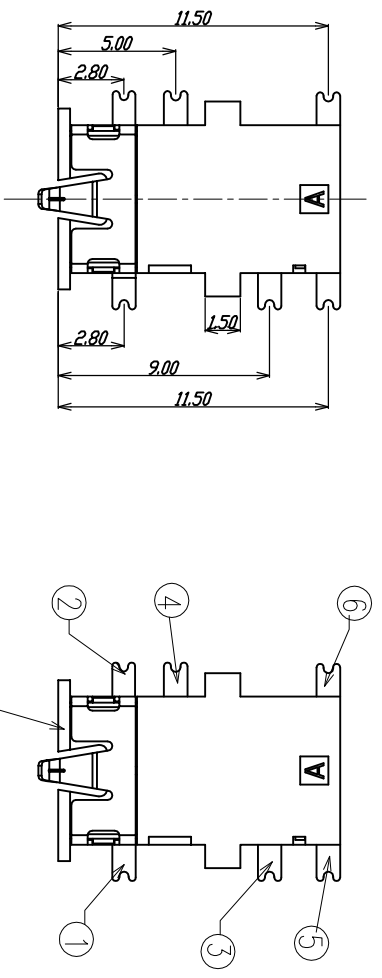

(ϕ 3.50mm 4 POLE PLUG DETAIL DRAWING)

ITEM	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑦	HOUSING	1	PPA	Gold Flash	Block
⑥	CONTACT F	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	

CUSTOMER DRAWING

YTCOON
Dongguan YTCOON Electronics Technology Co., Ltd.

GENERAL TOLERANCE	DRAWING	DEVI	TITLE:	PHONE JACK CONNECTOR
X \pm 0.20	APPROVED		P/N:	slim 1.0mm type L=12mm 无头全贴
.XX \pm 0.15	DATE	2012.04.26	DRAWING NO.	PJ08-06AB05-02
.XXX \pm 0.10	UNIT	mm	SCALE	1:1
ANGEL TOLERANCE			SIZE	A4
X \pm 5°			SHEET	1 of 2
.XX \pm 7°			REV	A
.XXX \pm 1°				