

REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

- NOTES:
- CONTACT CURRENT RATING: 1A.
  - CONTACT RESISTANCE: 50 mΩ MAX.;
  - INSULATION RESISTANCE: 1000 Ω MIN.;
  - DIELECTRIC WITHSTANDING: 500V AC MIN.;
  - DURABILITY: 5,000 CYCLES MIN.;
  - CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
  - CONNECTOR UNMATING FORCES: 2.94N(O.30kgf) MIN.;

PRODUCT NO. \_\_\_\_\_

PJ13-06 A B 05-01

- ①
- ②
- ③
- ④

① PRODUCT SERIES:

PJ13: PHONE JACK CONNECTOR slim 2.8mm type.

② PIN NO.:


06: 6PIN

③ MATERIAL:

A: PA9T

④ SERIES NO.:

01: 斜口, 正插型

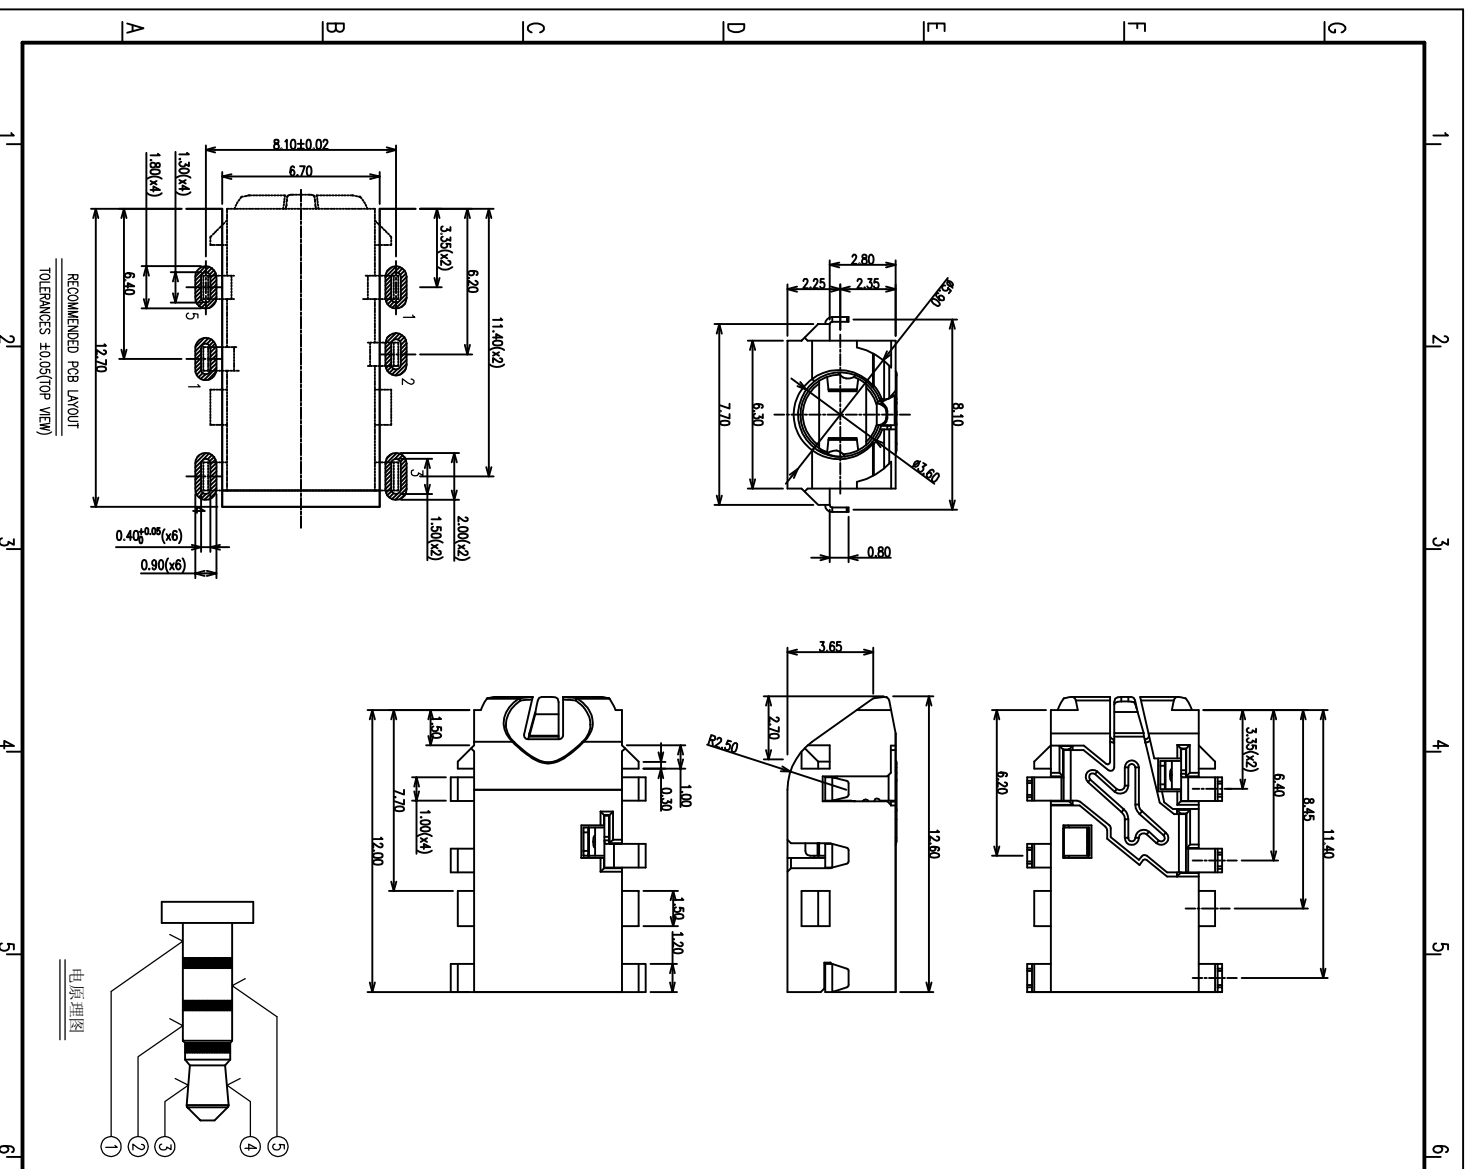

**CUSTOMER DRAWING**

**YTCOON**  
Dongguan YTCOON Electronics Technology Co., Ltd.

GENERAL TOLERANCE	DRAWING	DEV1	TITLE:	PHONE JACK CONNECTOR slim 2.8mm
X ±0.20	APPROVED		P/N:	PJ13-06AB05-01
.XX ±0.15	DATE	2012.05.25	DRAWING NO.	C-PJ13-01
.XXX ±0.10	UNIT	mm	SCALE	1:1
ANGEL TOLERANCE	SIZE	A4	SHEET	1of1
X ±5°	REV	A		
.XX ±2°				
.XXX ±1°				

电原理图

RECOMMENDED PCB LAYOUT  
TOLERANCES ±0.05(TOP VIEW)