
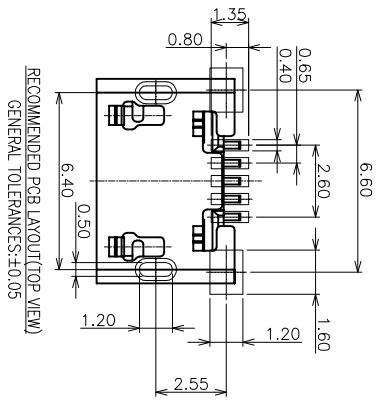





REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.06.28

- NOTES:
1. CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
 2. VOLTAGE: 30 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 30 MILLIONHM MAX.
 5. DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
 6. INSULATION RESISTNACE: 100 MEGOHMS MIN

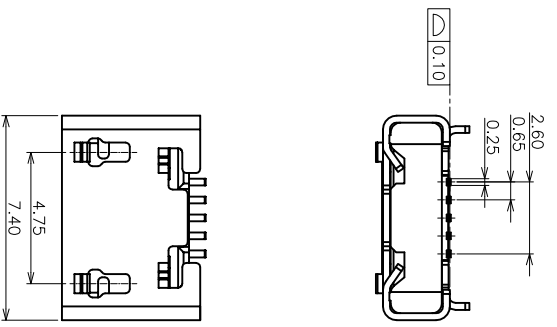

PRODUCT NO.

MU16 - 05 A B 03 - 03

- ① 产品系列:
- ② 产品PLN数:
- ③ 材质:

MU16: MICRO USB 连接器带铁片系列

05: SP1N

A: LCP

④ 产品流水号:
03: 6.4间距前插后贴片无柱无翻边

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	PLATE	STAINLESS STEEL T=0.10mm	----	1PCS
3	SHELL	SUS 304 1/2H T=0.25mm	Au/Ni Plated	1PCS
2	CONTACT	C2880-H T=0.15mm	UNDER-PLATING: Ni 50μ" SOLDER AREAS: G/F CONTACT AREAS: G/F	1SET
1	HOUSING(W/O)	PA9T UL94V-0	BLACK	1PCS

CUSTOMER DRAWING

YTCOON
Dongguan YTCOON Electronics Technology Co., Ltd.
<http://www.ytconn.com>

GENERAL TOLERANCE
X ±0.20
XX ±0.15
XXX ±0.10

ANGLE TOLERANCE
X ±3°
XX ±2°
XXX ±1°

DRAWING	DEY1	TITLE:
APPROVED		MICRO USB SP1N 前插后贴片翻边 6.40 无柱带铁片
DATE	2015. 11. 17	P/N:
		MU16-05AB03-03
		DRAWING NO.
		C-MU16-03

1 2 3 4 5 6 7 8 9 10
A B C D E F G