


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		

NOTES:
1.0 RATING:
1.1 VOLTAGE:12 VAC (rms)
1.2 CURRENT: 1 AMPERES MAX. PER CONTACT
1.3 OPERATION TEMPERATURE RANGE: -25°C~+70°C
2.0 ELECTRIC CHARACTERISTIC:
2.1 CONTACT RESISTANCE:60mΩ MAX.
2.2 INSULATION RESISTANCE: 1000MΩ MIN.
2.3 DIELECTRIC WITHSTANDING
VOLTAGE:500V AC FOR 1 MINUTE

料号编码
SM10 - 06 A B 05- **
① ② ③ ④
① PRODUCT SERIES:
SM10:STANDARD CONNECTOR
② PIN NO.:
06: 6PIN
③ MATERIAL:
A: LCP
④ SERIES NO.:
00: 0.7mm STICKARD连接器
01: 0.5mm STICKARD连接器

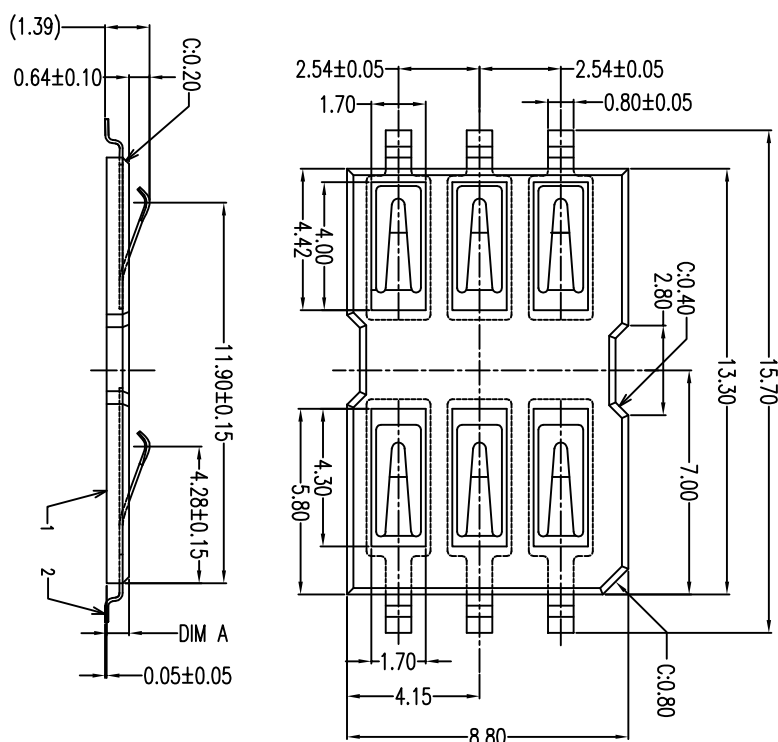

2	0.50	SM10-06AB05-01	0.50
1	0.70	SM10-06AB05-00	0.70
ITEM	HEIGHT	PART NUMBER	DTM: A

2	CONTACT	6	COPPER ALLOY, AU PLATED
1	HOUSING	1	THERMOPLASTIC UL94V-0 BLACK
ITEM	NAME	Q'TY/EACH	MATERIAL/FINISH/D

YTCNN
Dongguan YTCNN
Electronics Technology Co., Ltd.

GENERAL TOLERANCE		DRAWING		TITLE	
X, ±0.20	XX ±0.15	XX ±0.10	ANGEL TOLERANCE	X, ±3°	XX ±2°
XX ±1°	XXX ±1°				
DATE		2012.04.26		DRAWING NO.	
UNIT		mm		SCALE	
1:1		SIZE		A4	
SHEET		10/2		REV	
A					