
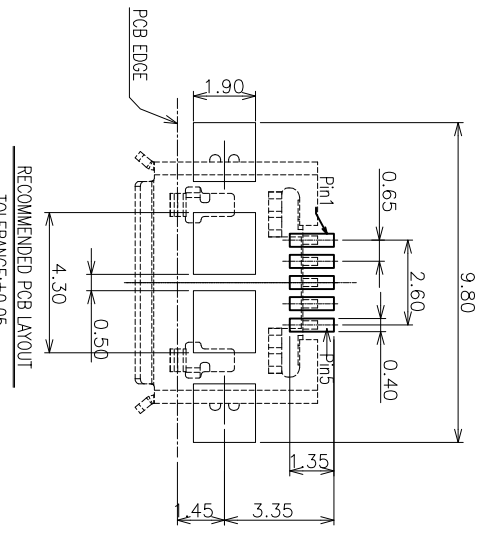

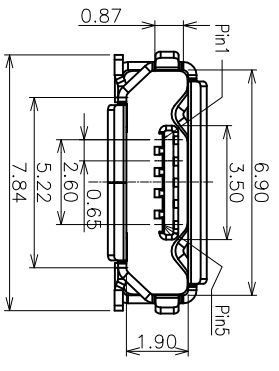
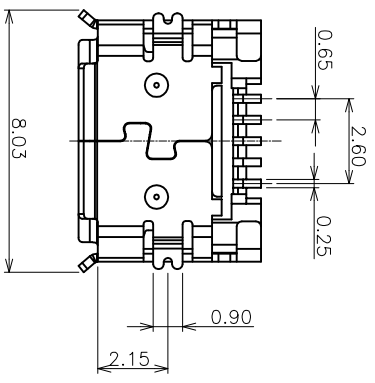




REV	ECH #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.04.26

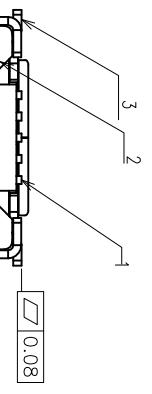

- NOTES:
- MATERIAL:
 - A. PIN&SHELL: ALLOY COPPER
 - B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS UL94V-0, BLACK.
 - ELECTRICAL SPECIFICATIONS:
 - VOLTAGE RATING: 250 VAC MIN
 - CURRENT RATING: 2.0 A MIN
 - DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
 - INSULATION RESISTANCE: 100 MEG OHM MIN
 - CONTACT RESISTANCE: 100 MILL.OHM MAX
 - OPERATION TEMPERATURE: -55to +125to
 - MECHANICAL SPECIFICATIONS:
 - 4.1 DURABILITY: 5,000 CYCLES
 - THE DIMENSION MARKED NO. SHOULD BE CHECKED IN PRODUCTION.
 - MATERIAL SHOULD BE FILLED ROHS REQUIREMENTS.

- PRODUCT NO. MU05 - 05 A B 05 - 00
- ① 产品系列: MU05: MICRO USB 连接器
 - ② 产品PIN数: 05: 5PIN
 - ③ 主体材质: A: PA9T
 - ④ SERIES NO.: 00: 标准型无柱

TABLE A:

3	SHELL	1	ALL Tin PLATED	
2	HOUSING	1	Thermoplastic UL94V-0, BLACK	
1	CONTACT	5	AU PLATED OVER Sn PLATED	
ITEM	NAME	Q'TY/EACH	MATERIAL/FINISH	REMARK

CUSTOMER DRAWING

YTCOON
Dongguan YTCOON Electronics Technology Co., Ltd

GENERAL TOLERANCE		DRAWING		TITLE:	
X	±0.20	DEY1		MICRO USB 5 PIN CONNECTOR	
XX	±0.15	APPROVED		P/N:	MU05-05AB05-00
XXX	±0.10	DATE	2012.04.26	DRAWING NO.	C-MU05-00
ANGEL TOLERANCE		UNIT	mm	SCALE	1:1
X	±3°	SIZE	A4	SHEET	1of1
XX	±2°	REV			A
XXX	±1°				