

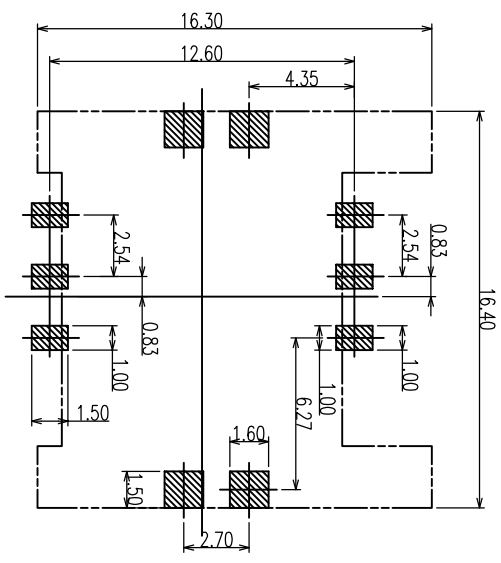

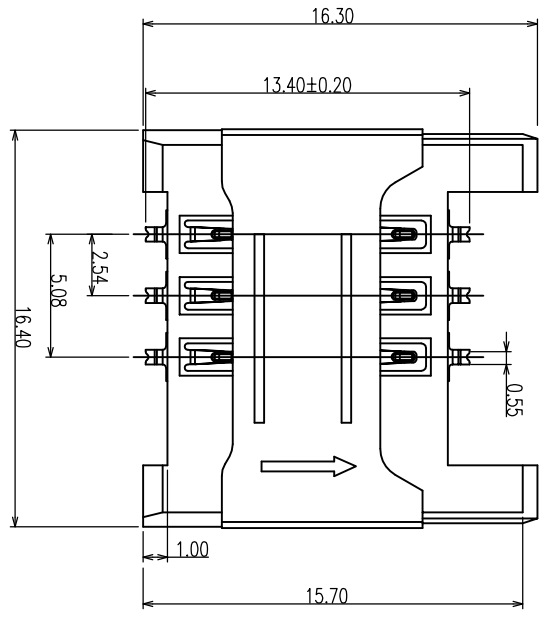


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		

Specification
 *Electrical Characteristics:
 Contact Current Rating:0.5 Amperes.
 Dielectric Withstanding Voltage:AC500V r.m.s.
 Insulation Resistance:500 MΩ Minimum.
 Contact Resistance: 30 mΩ Maximum.
 *Environmental:
 Operating Temperature:-55C~+85C.
 *Environmental:
 Mating Cycles: 5,000 Insertions.
 *Material:
 Insulator:High-Temp Plastic UL 94V-0 Rated.
 Contact:Copper Alloy(t=0.15mm).
 Shell:Copper Alloy(t=0.20mm).

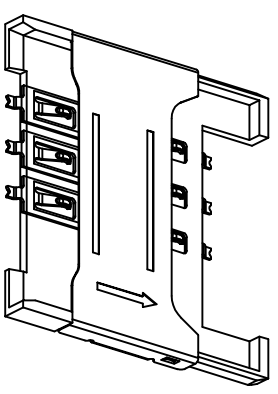

Recommended PCB Layout

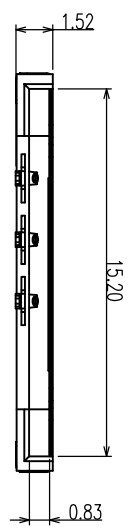

- 料号编码
 SM22 - 06 A B 05 - 00
 ① 产品系列: SM22:SIM连接器
 ② 产品PIN数: 06: 6PIN
 ③ 塑胶材料: A: LCP
 ④ 塑胶颜色: B: 黑色
 ⑤ 产品流水号 00: SIM CARD 1.5H 抽展式 端子同向

CUSTOMER DRAWING		YTCONN	
GENERAL TOLERANCE		TITLE	
X ±0.20	.XX ±0.15	SIM CARD 1.5H 抽展式 端子同向	
.XXX ±0.10		Dongguan YTCONN Electronics Technology Co., Ltd.	
DRAWING DEY1		DRAWING NO. SM22-06AB05-00	
APPROVED		DATE 2012.05.25	
ANGEL TOLERANCE		SCALE 1:1	
X ±3°	.XX ±2°	SIZE A4	
.XXX ±1°		SHEET 1 of 1	
UNIT mm		REV A	