
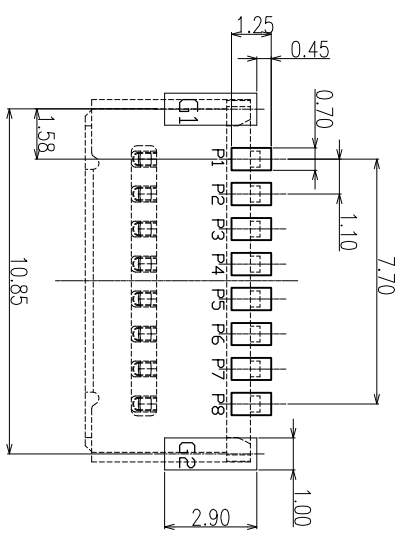
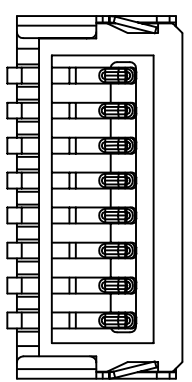
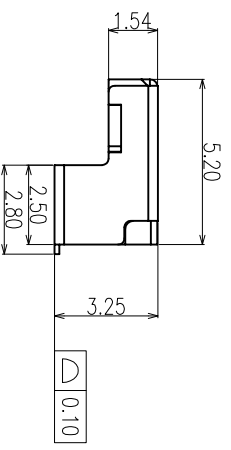
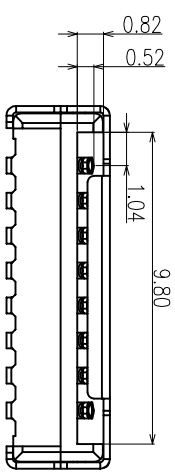
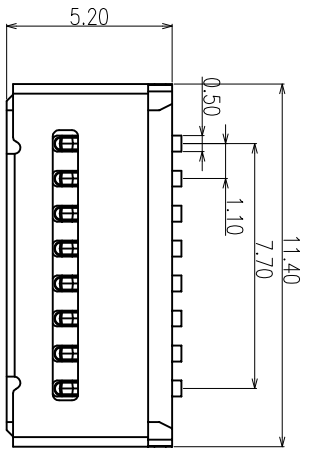


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012.09.14

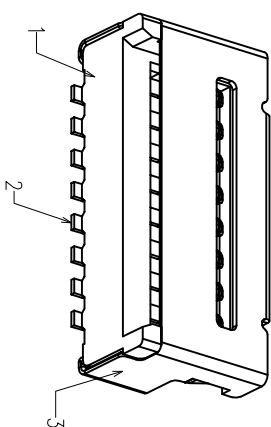

Connector Pin Ass

Pin NO.	PIN NUMBER
P1	DAT2
P2	CD/DAT3
P3	GND
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1
G1	GND
G2	GND

- NOTES 1:
- 1.0 RATING.
 - 1.1 VOLTAGE:100 VAC (rms)
 - 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
 - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
 - 2.0 ELECTRIC CHARACTERISTIC:
 - 2.1 CONTACT RESISTANCE:100mΩ MAX.
 - 2.2 INSULATION RESISTANCE:1000MΩ
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 - 3.0 OPERATION LIFE: 5000 CYCLES
 - 4.0 MATERIAL/FINISH:SEE TABLE A

PRODUCT NO.

TF03 - 08 A B 05- 03
 ① ② ③ ④

- ① 产品系列: TF03-T-FLASH CARD 简易式
- ② 产品PIN数: 08: 8PIN
- ③ 塑胶材料: A: LCP BLACK
- ④ 流水码: 03: H=3, 25MM, 无检测端

TABLE A:

ITEM	NAME	QTY/EACH	MATERIAL/FINISH	REMARK
3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATING AREA Au PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	

CUSTOMER DRAWING

YTCONN
<http://www.ytconn.com>

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE

- X ±0.20
- XX ±0.15
- .XXX ±0.10

ANGEL TOLERANCE

- X ±3°
- XX ±2°
- .XXX ±1°

DRAWING

DRAWING DEVT1

TITLE

T-FLASH CARD CONNECTOR

DATE

2012. 09. 14

P/N:

TF03-08AB05-03

DRAWING NO.

C-TF03-03

DATE

2012. 09. 14

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 2

REV

A