

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012.04.26

NOTES 1:

- 1.0 RATING.
- 1.1 VOLTAGE:100 VAC (rms)
- 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
- 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
- 2.0 ELECTRIC CHARACTERISTIC:
- 2.1 CONTACT RESISTANCE:100mΩ MAX.
- 2.2 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.3 DIELECTRIC WITHSTANDING
- VOLTAGE:500V AC FOR 1 MINUTE
- 3.0 OPERATION LIFE: 5000 CYCLES
- 4.0 MATERIAL/FINISHSEE TABLE A

PRODUCT NO.

TF03 - 08 A B 05- 00
 ① ② ③ ④

① 产品系列:

TF03-T-FLASH CARD 简易式 H=3.75MM

② 产品Pin数:






08: 8PIN

③ 塑胶材料:

A: LCP BLACK

④ 流水码:

00: H=3.75MM

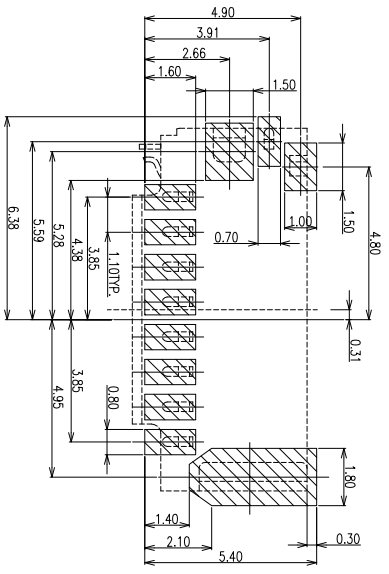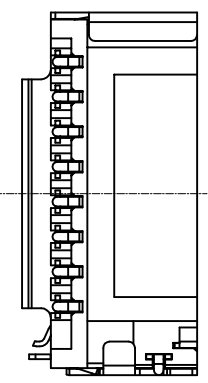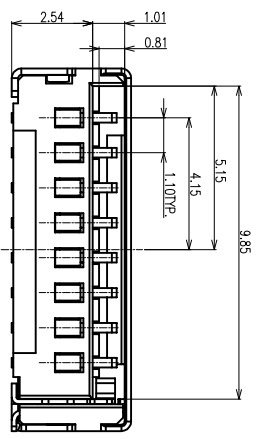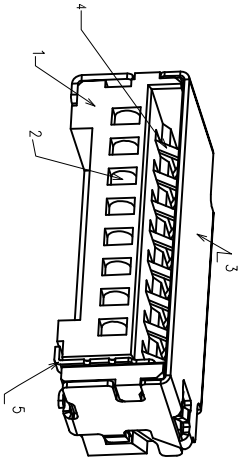

RECOMMENDED PCB LAYOUT
 TOLERANCES ±0.05

TABLE A:

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
5	CONTACT-11	1	COPPER ALLOY MATTING AREA Au PLATED	
4	CONTACT-1	1	COPPER ALLOY MATTING AREA Au PLATED	
3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATTING AREA Au PLATED	
1	HOUSING	1	THERMOPLASTIC U94V-0, BLACK	

CUSTOMER DRAWING
 YTCOON
 Dongguan YTCOON Electronics Technology Co., Ltd.
<http://www.hnytcoon.com>

GENERAL TOLERANCE
 X ±0.20
 XX ±0.15
 XXX ±0.10

ANGLE TOLERANCE
 X ±3°
 XX ±2°
 XXX ±1°

DRAWING DEVT1 TITLE: T-FLASH CARD CONNECTOR
 APPROVED P/N: TF03-08AB05-00
 DATE 2012. 04. 26 DRAWING NO. C-TF03-00

UNIT	SCALE	SIZE	A4 SHEET	10/2 REV	A
mm	1:1	A4	10/2	REV	A