

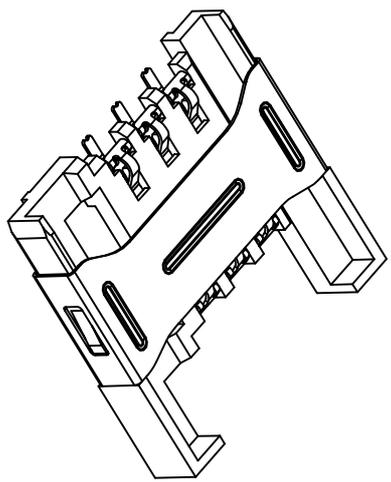
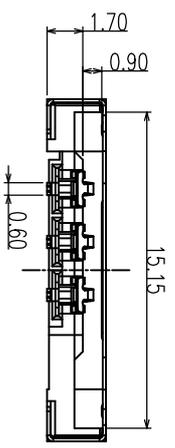
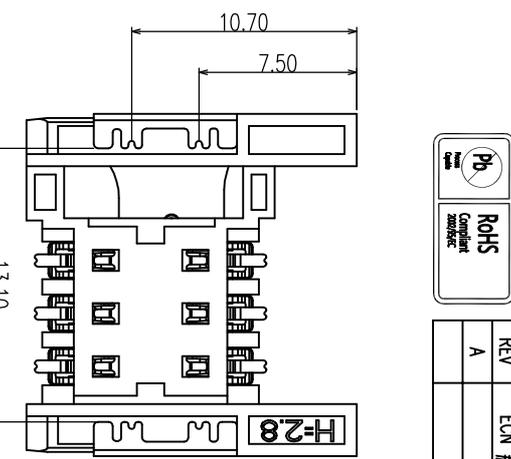


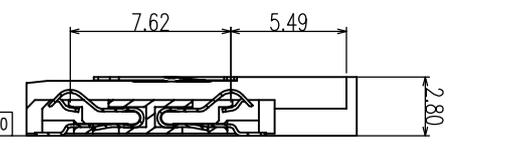

REV	ECN #
A	

DESCRIPTION
NEW RELEASE

DRAWING	APPROVED	DATE
DEYI		07/13/12

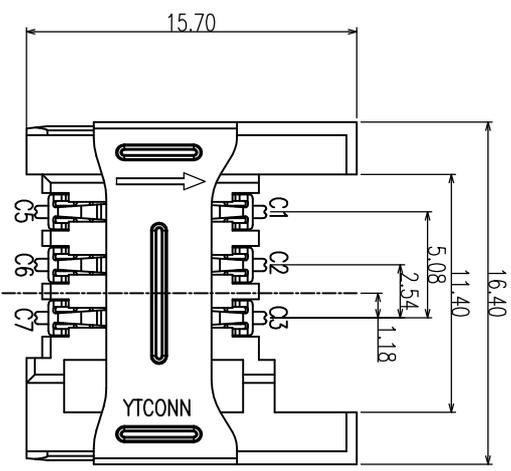


- NOTES:
- 1.0 RATING.
 - 1.1 VOLTAGE: 12 VAC (rms)
 - 1.2 CURRENT: 1 AMPERES MAX. PER CONTACT
 - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+85°C
 - 2.0 ELECTRIC CHARACTERISTIC:
 - 2.1 CONTACT RESISTANCE: 50 MILLIOM MAX
 - 2.2 INSULATION RESISTANCE: 1000M
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
 - 3.0 OPERATION LIFE: 5000 CYCLES

料号编码

SM01-06 C B 05-02

- ① 产品系列: SM01: SIM卡连接器
- ② 产品PIN数: 06: 6PIN
- ③ 塑胶材料: C: LCP
- ④ 塑胶颜色: B: 黑色
- ⑤ 产品流水号: 02: SIM CARD 2.8h.

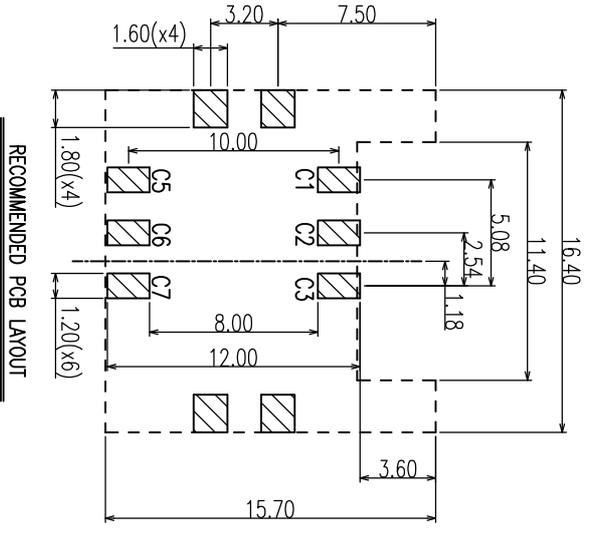

RECOMMENDED PCB LAYOUT

YTCOON
<http://www.ytconn.com>
Dongguan YTCOON Electronics Technology Co., Ltd

CUSTOMER DRAWING

GENERAL TOLERANCE	DRAWING	DEYI	TITLE:
X ±0.20			2.8MM SIMCARD连接器
.XX ±0.15	APPROVED		
.XXX ±0.10			

ANGEL TOLERANCE	DATE	DRAWING NO.
X ±3°	2015.07.13	C-SM01-02
.XX ±2°		
.XXX ±1°		

UNIT	SCALE	SIZE	SHEET	REV
mm	1:1	A4	1of1	A