
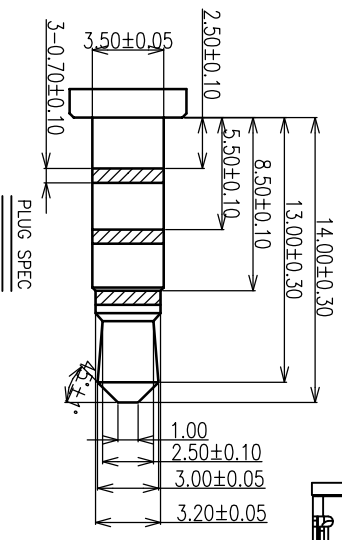






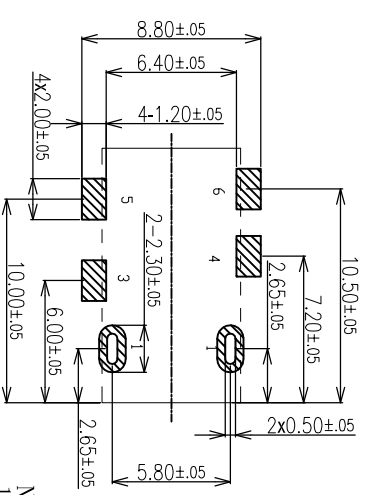


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25



PLUG SPEC

- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX. ;
 3. INSULATION RESISTANCE: 1000Ω. MIN. ;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN. ;
 5. DURABILITY: 5,000 CYCLES MIN. ;
 6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX. ;
 7. CONNECTOR UNMATING FORCES: 2.94N (0.30kgf) MIN. ;

PRODUCT NO. _____

PJ14-06 A B 03-00

① ② ③ ④

① PRODUCT SERIES:

PJ14: PHONE JACK CONNECTOR斜口前插/后贴

② PIN NO. :

06: 6PIN

③ MATERIAL:

A: LCP

④ SERIES NO. :

00:

YTCONN

Dongguan YTCONN
Electronics Technology Co., Ltd.

CUSTOMER DRAWING

DRAWING DEV1

PHONE JACK CONNECTOR 斜头前插后贴

GENERAL TOLERANCE

DATE 2012.05.25

ANGEL TOLERANCE

P/N: PJ14-06AB03-00

X ±0.20

DRAWING NO. C-PJ14-00

.XX ±0.15

UNIT mm SCALE 1:1 SIZE A4 SHEET 1 of 1 REV A

.XXX ±0.10

DATE 2012.05.25

X ±3


DATE 2012.05.25

.XX ±2

DATE 2012.05.25

.XXX ±1

DATE 2012.05.25



ITEM	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑥	HOUSING	1	LCP		Black
④	CONTACT 6	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
⑤	CONTACT 5	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT 4	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT 3	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT 1	1	PHOSPHOR BRONZE 0.20T	Gold Flash	