

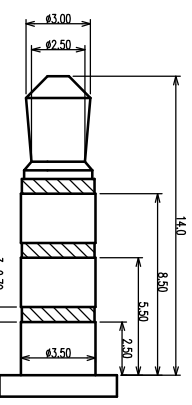
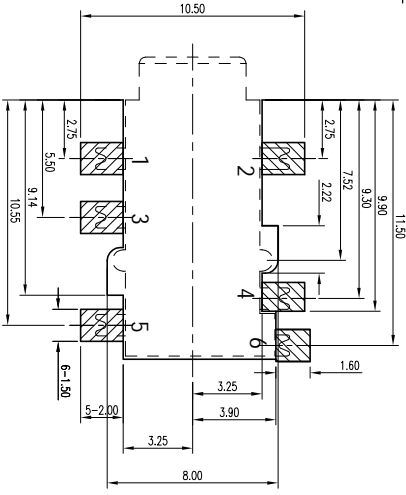
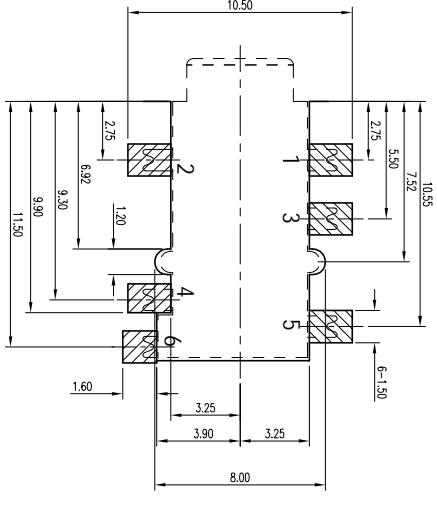



| REV | ECON # | DESCRIPTION | DRAWING | APPROVED | DATE |
|-----|--------|-------------|---------|----------|-----------|
| A | | NEW RELEASE | DEYI | | 2012/4/24 |
| | | | | | |

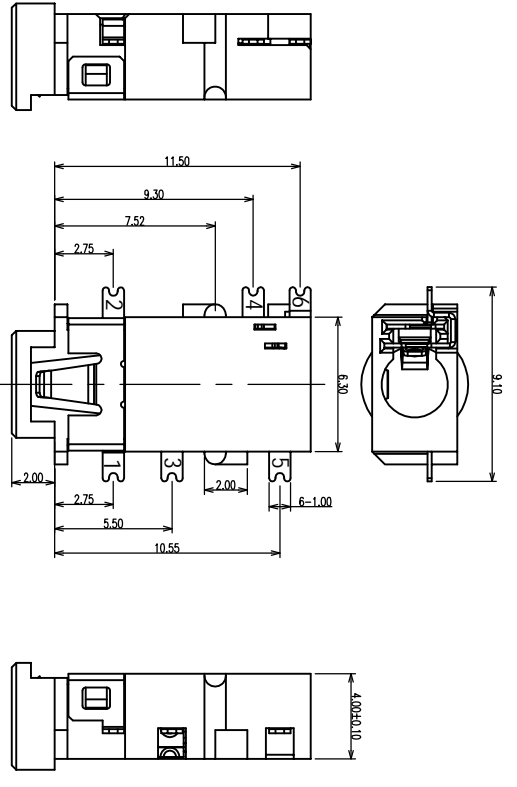

| NO. | Part Name | QTY | Description | Plated/Color | Note |
|-----|------------|-----|---------------------|--------------|------------|
| 1 | TERMINAL A | 1 | CS210R-H T=0.20mm | Plated Au | |
| 2 | TERMINAL B | 1 | CS210R-H T=0.20mm | Plated Au | |
| 3 | TERMINAL C | 1 | CS210R-H T=0.20mm | Plated Au | |
| 4 | TERMINAL D | 1 | CS210R-H T=0.20mm | Plated Au | |
| 5 | TERMINAL E | 1 | CS210R-H T=0.20mm | Plated Au | |
| 6 | TERMINAL F | 1 | CS210R-H T=0.20mm | Plated Au | |
| 7 | HOUSING | 1 | LCP+30%GF/PA6+40%GF | Color BLACK | (UL-94V-0) |

- NOTES :
- 1.0. RATING :
 - 1.1. VOLTAGE : 12 VAC (R.M.S.)
 - 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
 - 1.3. TEMPERATURE : -20°C TO +70°C
 - 2.0. ELECTRICAL CHARACTERISTIC :
 - 2.1. CONTACT RESISTANCE : 50 MILLIOHMS MAXIMUM INITIAL
 - 2.2. INSULATION RESISTANCE : 100 MEGOHMS MINIMUM
 - 2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
 - 3.0. MATERIALS :
 - 3.1. CONTACT : COPPER ALLOY
 - 3.2. HOUSING : THERMOPLASTIC, GLASS FILLED, 130°C, UL 94V-0 RATED
 - 4.0. MECHANICAL :
 - 4.1. INSERTION FORCE(PER CONTACT): 300~3000 GRAMS
 - 4.2. WITHDRAWAL FORCE(PER CONTACT): 300~3000 GRAMS
 - 4.3. DURABILITY ,MINIMUM: MATED 5000 TIMES WITHOUT DEGRADING ELECTRICAL CHARACTERISTICS
 - 4.4. CONTACT FORCE, MINIMUM: 80 GRAMS

PRODUCT NO. : P102-06 A B 07-00

PRODUCT SERIES : ① ② ③ ④

① P102: PHONE JACK CONNECTOR slim type.

② PIN NO. : 04: 4PIN 06: 6PIN

③ MATERIAL: A: LCP

④ SERIES NO. : 00: ø3.5mm 长头 H=4.0mm正包装 05: ø3.5mm 长头 H=4.0mm反包装

CUSTOMER DRAWING

YTCOON Dongguan YTCOON Electronics Technology Co., Ltd

| GENERAL TOLERANCE | | DRAWING | | TITLE: | |
|-------------------|-------|----------|------------|--------------------------------|----------------|
| X | ±0.20 | DRAWING | DEYI | PHONE JACK CONNECTOR SLIM TYPE | |
| .XX | ±0.15 | APPROVED | | (长头) | |
| .XXX | ±0.10 | DATE | 2014.05.05 | P/N: | P102-06AB07-0X |
| ANGEL TOLERANCE | | DATE | 2014.05.05 | DRAWING NO. | C-P102-00 |
| X | ±3° | UNIT | mm | SCALE | 1:1 |
| .XX | ±2° | SCALE | 1:1 | SIZE | A4 |
| .XXX | ±1° | SHEET | 1 of 1 | SHEET | 1 of 1 |