
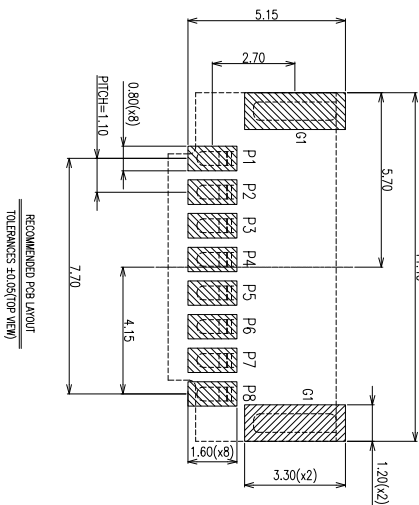


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.04.26

NOTES 1:  
1.0 RATING.  
1.1 VOLTAGE:100 VAC (rms)  
1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT  
1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C  
2.0 ELECTRIC CHARACTERISTIC:  
2.1 CONTACT RESISTANCE:100mΩ MAX.  
2.2 INSULATION RESISTANCE: 1000MΩ MIN.  
2.3 DIELECTRIC WITHSTANDING  
VOLTAGE:500V AC FOR 1 MINUTE  
3.0 OPERATION LIFE: 5000 CYCLES  
4.0 MATERIAL/FINISH-SEE TABLE A

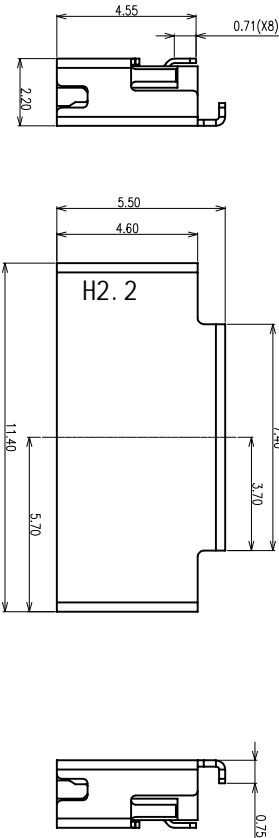

PRODUCT NO.

TF03 - 08 A B 05- 07  
① ② ③ ④

① 产品系列:

TF03::T-FLASH CARD 简易式

② 产品Pin数:

08: 8PIN

③ 塑胶材料:

A: LCP BLACK

4 流水码:

07: 1#2.2MM, 无侦测端

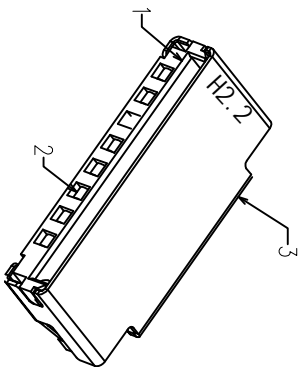
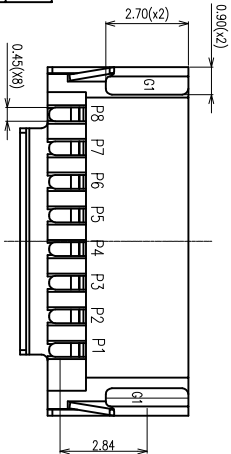
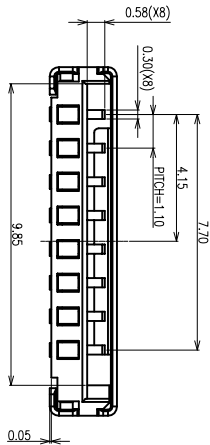


TABLE A:

ITEM	NAME	Q'TY/each	MATERIAL/FINISH	REMARK
3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATING AREA AU PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	

CUSTOMER  
DRAWING

YTCONN  
<http://www.tinyconn.com>

Dongguan YTCONN  
Electronics Technology Co., Ltd.

GENERAL TOLERANCE

X. ±0.20  
.XX ±0.15  
.XXX ±0.10

ANGLE TOLERANCE

X. ±3°  
.XX ±2°  
.XXX ±1°

DRAWING

DEV1

TITLE:

T-FLASH CARD CONNECTOR

APPROVED

P/N:

TF03-08AB05-07

DATE

2014. 01. 02

DRAWING NO.

C-TF03-07

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 2

REV

A

POSITION NO.	FUNCTION	POSITION NO.	FUNCTION
P1	DAT2	G1	GND
P2	CD/DAT3		
P3	CMD		
P4	VDD		
P5	CLK		
P6	VSS		
P7	DAT0		
P8	DAT1		

1 2 3 4 5 6 7 8 9 10