
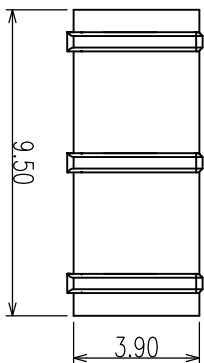
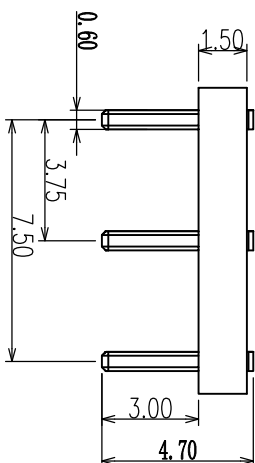




REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/4/24



- NOTES:
- CONTACT CURRENT RATING: 1.0A.
 - CONTACT RESISTANCE: 50 m Ω MAX.;
 - INSULATION RESISTANCE: 1000 Ω MIN.;
 - DIELECTRIC WITHSTANDING: 300V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.8N (3.00Kg f) MAX.;
 - CONNECTOR UNMATING FORCES: 3N(0.31Kg f) MIN.;
 - PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

PRODUCT NO.

BT08-03 A B 10-04

① ② ③ ④

PRODUCT SERIES:

① BT08: 3pin 刀式 电池连接器 N95

② PIN NO.:

03: 3PIN

③ MATERIAL:


A: LCP

④ SERIES NO.:

04: H=4.2mm

TABLE A:

MATTER	RoHs (PPM)
Cd	\leq 100
Pb	\leq 1000
Hg	\leq 1000
Cr6+	\leq 1000
PBB	\leq 1000
PBDE	\leq 1000

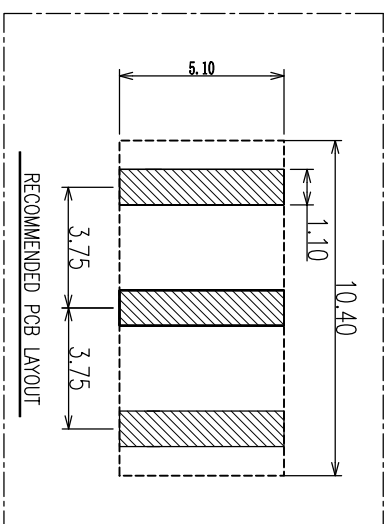

CUSTOMER DRAWING		YTCONN <small>http://www.hytconn.com</small>		Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE	X \pm 0.20 .XX \pm 0.15 .XXX \pm 0.10	DRAWING	DEYI	TITLE:	3PIN 刀片式 电池连接器
ANGEL TOLERANCE	X \pm 3° .XX \pm 2° .XXX \pm 1°	APPROVED		P/N:	H=4.2mm 3.75Pitch
		DATE	2012.04.24	DRAWING NO.	BT08-03AB10-04
		UNIT	mm	SCALE	1:1
		SIZE	A4	SHEET	1of1
		REV	A		