


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.11.05





NOTES:
 SPECIFICATION:
 1.1 CURRENT RATING: 1.0A MAX
 1.2 VOLTAGE: 100 VAC
 1.3 TEMPERATURE RANGE: -30 °C ~ 85 °C
 1.4 CONTACT RESISTANCE: 30 MILLIONHM MAX
 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 200 VAC r.m.s
 1.6 INSULATION RESISTNACE: 100 MEGOHMS MIN.

PRODUCT NO.

MU15 - 05 A B 05 -01

① ② ③ ④

- ① 产品系列: MU15: 反向MICRO USB 连接器
- ② 产品PIN数: 05: 5PIN
- ③ 主体材质: A: PA9T
- ④ SERIES NO. : 01: 反向沉板0.8 四脚插板无翻边

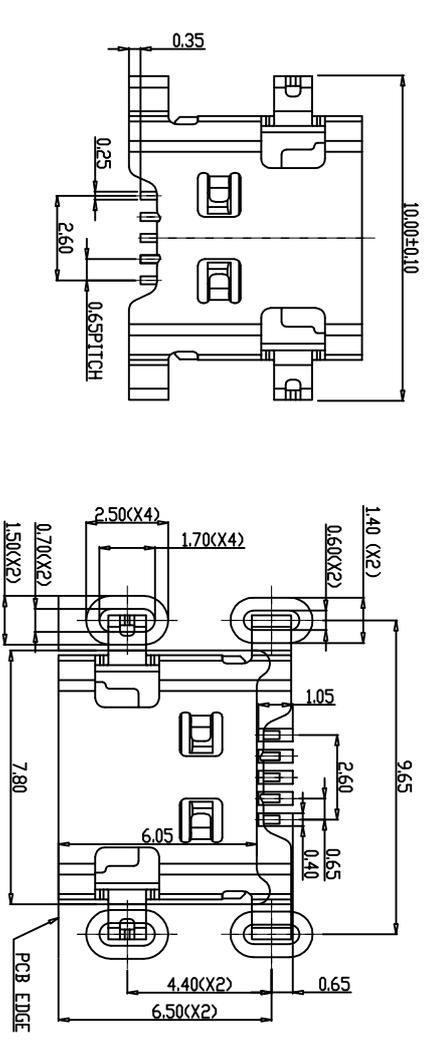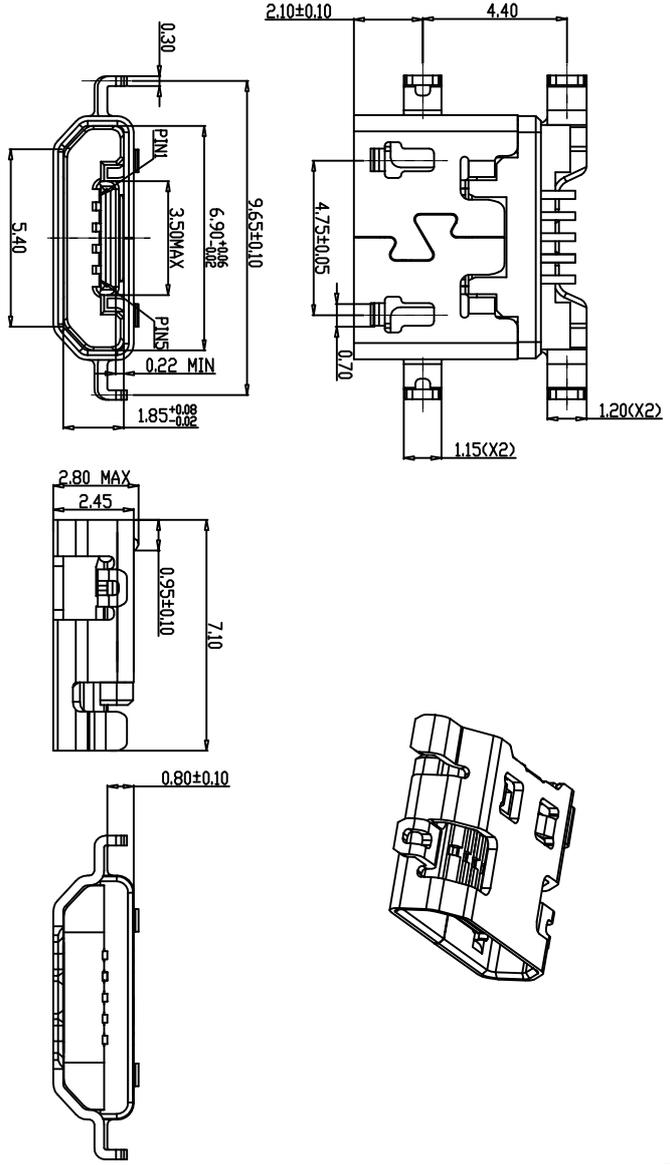

RECOMMENDED PCB LAYOUT(TYP VIEW)
 GENERAL TOLERANCES:F0.05

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1PCS
2	HOUSING	High temperature plastic	BLACK	1SET
1	SHELL	STAINLESS STEEL T=0.30mm	MATTE TIN/Ni Plated	1PCS

YTCOON
 Dongguan YTCOON
 Electronics Technology Co., Ltd

GENERAL TOLERANCE		DRAWING		TITLE:	
X	±0.20	DRAWING	DEY1	MICRO USB SPIN	
XX	±0.15	APPROVED		反向沉板0.8 四脚插板无翻边(结构)一成品	
XXX	±0.10	DATE	2015.07.01	P/N:	MU15-05AB05-01
ANGEL TOLERANCE		SCALE		DRAWING NO.	
X	±3°	UNIT	mm	SIZE	A4
XX	±2°	SCALE	1:1	SHEET	1of1
XXX	±1°	SCALE	1:1	SHEET	1of1

REV	DATE	BY	CHK	APP