
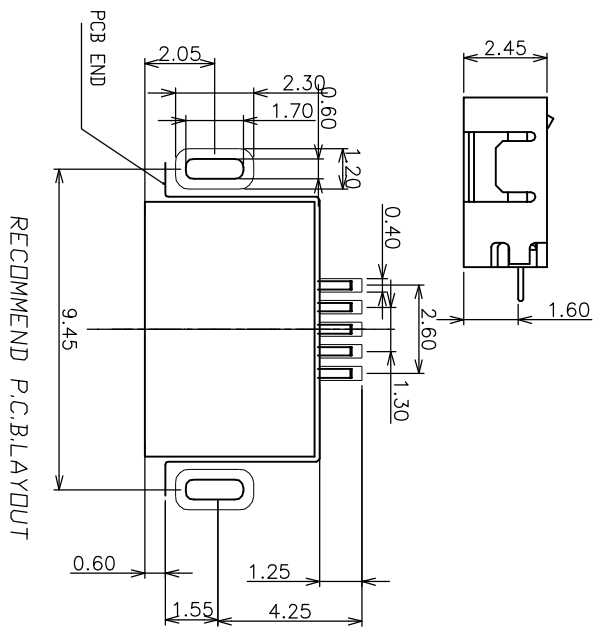
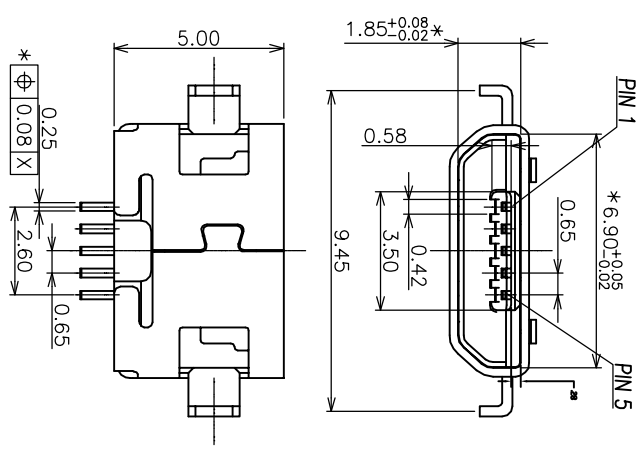


REV	ECH #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012\04\26

SPECIFICATIONS

- 1.VOLTAGE RATING:30V AC
- 2.CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A(FOR TERMINAL NO.2,3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A(FOR TERMINAL NO.1 AND 5)
0.5A(FOR TERMINAL NO.2,3 AND 4)
- 3.INSULATION RESISTANCE:100M MIN/AT 100V DC
- 4.DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- 5.CONTACT RESISTANCE:30m MAX.
- 6.OPERATING TEMPERATURE:-30 TO +80.

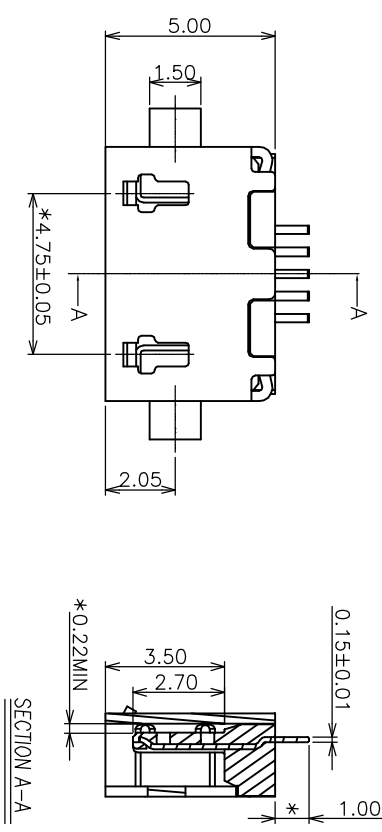

PRODUCT NO.

MU05 - 05 A B 05 - 22

- ①
- ②
- ③
- ④

① 产品系列:

MU05: MICRO USB 5PIN RECEPTACLE

② 产品PIN数:

05: 5PIN

③ 材质:

A: LCP

④ 产品流水码:

22: 沉板1.6 DIP9.45

CUSTOMER DRAWING		YTCONN http://www.ytconn.com		Dongguan YTCONN Electronics Technology Co., Ltd	
GENERAL TOLERANCE	DRAWING	DEYI	TITLE:	MICRO USB 5PIN RECEPTACLE	
X ±0.20	APPROVED		P/N:	MU05-05AB05-22	
XX ±0.15	DATE	2013.05.11	DRAWING NO.	C-MU05-22	
XXX ±0.10	UNIT	mm	SCALE	1:1	SIZE A4
ANGEL TOLERANCE			SHEET	1of1	REV A
X ±3°					
XX ±2°					
XXX ±1°					