


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.11.05

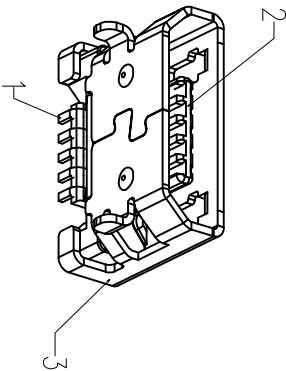

NOTES:

- MATERIAL:
 - PIN&SHELL: ALLOY COPPER
 - INSULATOR: HIGH TEMPERATURE THERMOPLASTICS UL94V-0, BLACK.
- ELECTRICAL SPECIFICATIONS:
 - VOLTAGE RATING: 250 VAC MIN
 - CURRENT RATING: 2.0 A MIN
 - DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
 - INSULATION RESISTANCE: 100 MEG OHM MIN
 - CONTACT RESISTANCE: 100 MILLIOHM MAX
 - OPERATION TEMPERATURE: -55to +125to
- MECHANICAL SPECIFICATIONS:
 - 3.1 DURABILITY: 5,000 CYCLES
- THE DIMENSION MARKED NO. SHOULD BE CHECKED IN PRODUCTION.
- MATERIAL SHOULD BE FULFILLED ROHS REQUIREMENTS.

PRODUCT NO.

MU05 - 05 A B 07 - 20
① ② ③ ④

- ① 产品系列:
MU05: MICRO USB 连接器
- ② 产品PIN数:
05: 5PIN
- ③ 主体材质:
A: PA9T
- ④ SERIES NO.:

20: 6.4mm间距, 无翻边, 无定位柱

TABLE A:

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
3	SHELL	1	ALL IN PLATED	
2	HOUSING	1	Thermoplastic UL94V-0, BLACK	
1	CONTACT	5	Au PLATED OVER Sn PLATED	

CUSTOMER DRAWING

YTCONN

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE

RECOMMENDED PCB LAYOUT(TOP VIEW)

ANGEL TOLERANCE

X. ±0.20
.XX ±0.15
.XXX ±0.10
X. ±.3°
.XX ±2°
.XXX ±1°

DRAWING	DEY1	TITLE:
APPROVED		MICRO USB 5PIN CONNECTOR DIP TYPE (外壳半金镀)
DATE	2016.01.15	DRAWING NO. C-MU05-28

