
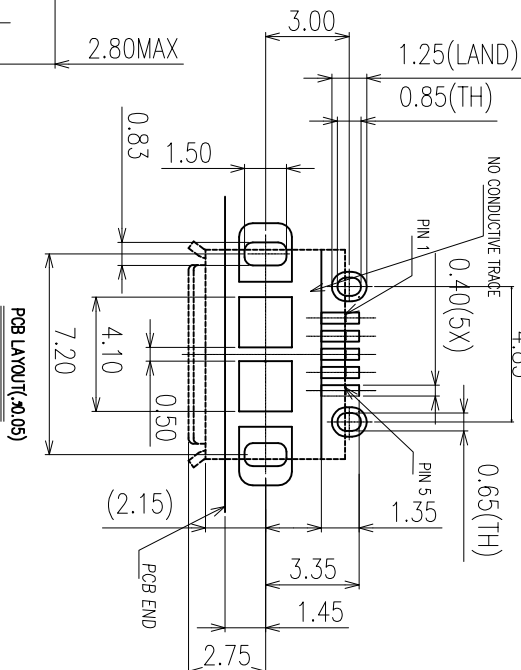

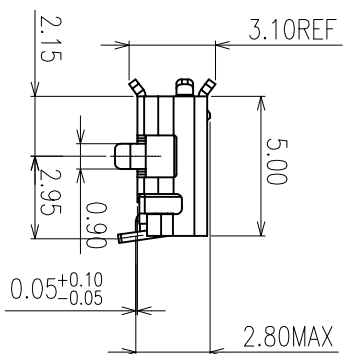
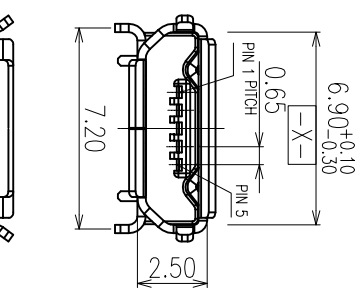


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			

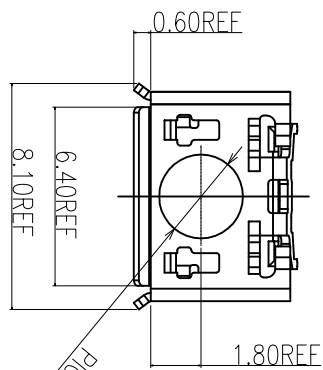

- NOTES:
- MATERIAL:
    - A. PINKSHELL: ALLOY COPPER
    - B. INSULATOR: HIGH TEMPERATURE THERMOPLASTICS
    - UL94V-0, BLACK.
  - ELECTRICAL SPECIFICATIONS:
    - VOLTAGE RATING: 250 VAC MIN
    - CURRENT RATING: 2.0 A MIN
    - DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE MIN
    - INSULATION RESISTANCE: 100 MEG OHM MIN
    - CONTACT RESISTANCE: 100 MILLIOHM MAX
    - OPERATION TEMPERATURE: -55to +125to
    - 4.1 DURABILITY: 5,000 CYCLES
  - MECHANICAL SPECIFICATIONS:
    - 4.1 DURABILITY: 5,000 CYCLES
  - THE DIMENSION MARKED NO. SHOULD BE CHECKED IN PRODUCTION.
  - MATERIAL SHOULD BE FILLED TO ROHS REQUIREMENTS.

PRODUCT NO.

MU05 - 05 A B 05 - 11

① ② ③ ④

① 产品系列:

MU05: MICRO USB 连接器

② 产品PIN数:


05: 5PIN

③ 主体材质:

A: LCP

④ SERIES NO.:

11: 外壳4脚插板, 前2脚中心距7.2mm, 有翻边

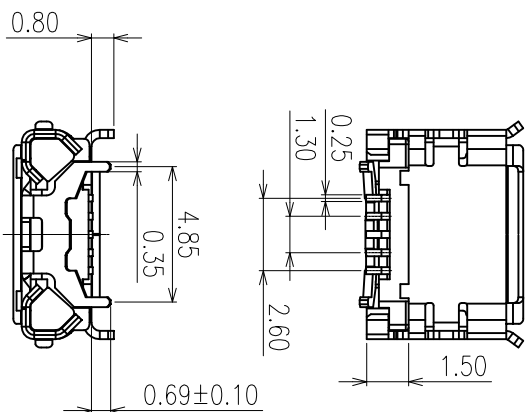

**YTCOON**

*Dongguan YTCOON  
Electronics Technology Co., Ltd.*

**CUSTOMER  
DRAWING**

GENERAL TOLERANCE

X. ±0.20  
.XX ±0.15  
.XXX ±0.10

ANGLE TOLERANCE

X. ±3°  
.XX ±2°  
.XXX ±1°

DRAWING

DEV1

APPROVED

P/N:

MU05-05AB05-11

DATE

2013. 06. 20

DRAWING NO.

C-MU05-11



UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 1

REV

A