
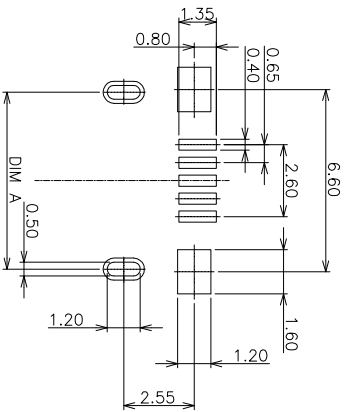






REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.06.28



RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

- NOTES:
- CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
  - VOLTAGE: 30 VAC
  - TEMPERATURE RANGE: -30 °C ~ 85 °C
  - CONTACT RESISTANCE: 30 MILLIONHM MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
  - INSULATION RESISTANCE: 100 MEGOHMS MIN

PRODUCT NO.

MU16 - 05 A B 03 - 04

- ①
- ②
- ③
- ④

① 产品系列:

MU16: MICRO USB 连接器带铁片系列

② 产品PN数:

05: SP1N

③ 材质:

A: LCP

④ 产品流水号:

04: 6.4间距前插后贴片无柱有翻边

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	PLATE	STAINLESS STEEL T=0.10mm		1PCS
3	SHELL	STAINLESS STEEL T=0.30mm	Au/Ni Plated	1PCS
2	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1SET
1	HOUSING (W/O)	High temperature plastic	BLACK	1PCS

**CUSTOMER DRAWING**

**YTCONN**  
Dongguan YTCONN Electronics Technology Co., Ltd.  
<http://www.ytconn.com>

GENERAL TOLERANCE	DRAWING	DEY1	TITLE:
X. ±0.20	APPROVED		MICRO USB 5P
.XX ±0.15		P/N:	前插后贴6.40 无柱有翻边(带铁片)
.XXX ±0.10	DATE	2015. 11. 17	MU16-05AB03-04
ANGEL TOLERANCE		DRAWING NO.	C-MU16-04
X. ±3°			
.XX ±2°			
.XXX ±1°			

UNIT	SCALE	SIZE	SHEET	REV
mm	1:1	A4	1 of 1	A