REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/12/18

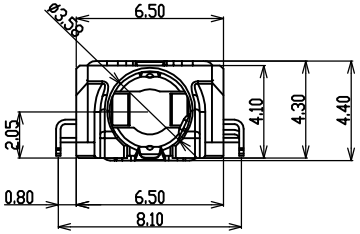

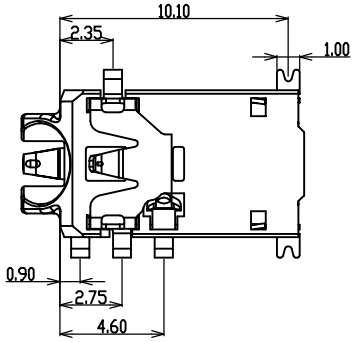





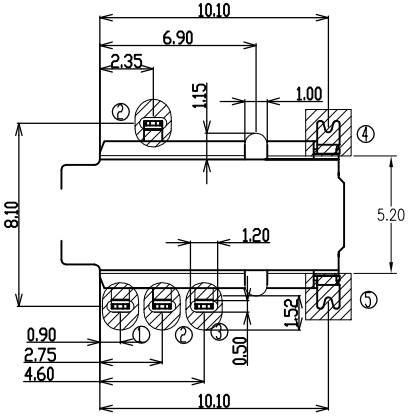

P.C.B LAYOUT
TOP VIEW

NOTES:

1) MATERIAL:

HOUSING: THERMOPLASTIC, UL 94V-0, COLOR:BLACK

CONTACT: COPPER ALLOY

2) FINISH

CONTACT: GOLD FLASH

3) PRODUCT SPECIFICATIONS:

3-1 WITHSTANDING:500V AC /MINUTE

3-2 CONTACT RESISTANCE:30 milliOHM(INITIAL) Max.

3-3 INSULATION RESISTANCE:100MEGOHM Min

3-4 INSERTION FORCE:2.22Kg Max (INITIAL)

3-5 WITHDRAWAL FORCE:0.22Kg Min (INITIAL)

3-6 DURABILITY:5000 CYCLES

PRODUCT NO.

PJ17-06 A B 03-00
① ② ③ ④

① PRODUCT SERIES:
PJ16: PHONE JACK CONNECTOR

② PIN NO.:
06: 6PIN

③ MATERIAL:
A: LCP

④ SERIES NO.:
00:沉板0.7H,前插后贴

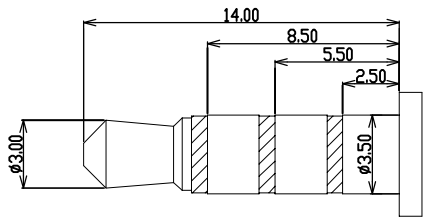

ø3.50 4 POLE PLUG



SCHEMATIC

CUSTOMER DRAWING	YTCONN Dongguan YTCONN Electronics Technology Co., Ltd.		
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	DEYI	TITLE: PHONE JACK CONNECTOR 斜头前插后贴,沉板0.7H
	APPROVED		P/N: PJ17-06AB03-00
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DATE	2012.12.18	DRAWING NO. C-PJ17-00
	UNIT mm	SCALE 1:1	SIZE A4 SHEET 1of1 REV A